





Description

Surface-mounted wall luminaire.

ADA (American Disabilities Act) Compliant.


IP66. Class I. IK08. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. CAD-optimized optics for superior illumination and glare control. Integral driver. OLC® One LED Concept. Advanced thermal management protects LEDs while optimizing lumens output. 0-10V Dimming comes standard with luminaire. Luminaire is factory-sealed and does not need to be opened during installation.

Luminaire can be mounted for up or down lighting. Suitable for installation on ceiling or wall over 4" recessed junction box.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX-9004 (Black)

+ XXX-XXXX (Accessory 1)

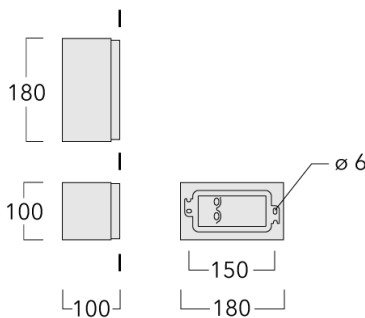

Specifications

Material description

Colors	RAL9004 Signal black	RAL9007 Grey aluminium	RAL9016 Traffic white	RAL8019 Grey brown
Ingress protection	IP66			
Impact resistance	IK08			




Electrical description

Power supply	Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.
Driver / Ballast	Standard. Optional DALI version available. To be specified at time of ordering.
Surge protection	1/2 kV




Additional information

Listings	ETL listed. Suitable for wet locations.
Lifetime	Ta=25°/40° L90B10 > 90000h

Options

Light distribution	Color temperature	Nominal Watt
 <p>[R45] rectangular asymmetric Type II</p>	6W [R45]	3 W 13 W
 <p>[M] symmetric, medium beam</p>	9W [R45]	
 <p>[N] bi-symmetric, narrow beam</p>	<div style="background-color: #FFD700; width: 20px; height: 20px; margin-bottom: 5px;"></div> 3000K <div style="background-color: #FFFF00; width: 20px; height: 20px; margin-bottom: 5px;"></div> 4000K	
	13W [R45]	
	6W [M]	
	9W [M]	
	13W [M]	
	6W [N]	
	9W [N]	
	13W [N]	

Configurations

Light distribution	Part ID	Light source	Delivered lumens	Rated input power	CRI
 <p>[M] symmetric, medium beam</p>	131-9606_us	LED-2/3W/13W [M]	1233.3 lm	3 W	80
	131-9966_us	LED-2/3W/6W [M]	698.5 lm	3 W	80
	131-9967_us	LED-2/3W/6W [M]	746.7 lm	3 W	80
	131-9604_us	LED-2/3W/6W [M]	650.4 lm	3 W	80
	131-9968_us	LED-2/3W/9W [M]	1019.9 lm	3 W	80
	131-9969_us	LED-2/3W/9W [M]	1067.3 lm	3 W	80
	131-9605_us	LED-2/3W/9W [M]	972.4 lm	3 W	80
	131-9970_us	LED-3/13W/3000K	1304.5 lm	13 W	80
	131-9971_us	LED-3/13W/4000K	1363.8 lm	13 W	80
	 <p>[N] bi-symmetric, narrow beam</p>	131-9609_us	LED-2/3W/13W [N]	1250.7 lm	3 W
131-9972_us		LED-2/3W/6W [N]	656.9 lm	3 W	80
131-9973_us		LED-2/3W/6W [N]	702.2 lm	3 W	80
131-9607_us		LED-2/3W/6W [N]	611.6 lm	3 W	80
131-9974_us		LED-2/3W/9W [N]	1034.3 lm	3 W	80
131-9975_us		LED-2/3W/9W [N]	1082.4 lm	3 W	80
131-9608_us		LED-2/3W/9W [N]	986.2 lm	3 W	80
131-9976_us		LED-3/13W/3000K	1322.9 lm	13 W	80
131-9977_us		LED-3/13W/4000K	1383 lm	13 W	80
 <p>[R45] rectangular asymmetric Type II</p>		131-9603_us	LED-2/3W/13W [R45]	931.3 lm	3 W
	131-9960_us	LED-2/3W/6W [R45]	548.2 lm	3 W	80
	131-9961_us	LED-2/3W/6W [R45]	586 lm	3 W	80
	131-9601_us	LED-2/3W/6W [R45]	510.4 lm	3 W	80
	131-9962_us	LED-2/3W/9W [R45]	770.1 lm	3 W	80
	131-9963_us	LED-2/3W/9W [R45]	805.9 lm	3 W	80
	131-9602_us	LED-2/3W/9W [R45]	734.3 lm	3 W	80
	131-9964_us	LED-3/13W/3000K	985 lm	13 W	80
	131-9965_us	LED-3/13W/4000K	1029.8 lm	13 W	80