





**Description**

Surface-mounted wall luminaire.

ADA (American Disabilities Act) Compliant.


IP66. Class I. IK08. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. CAD-optimized optics for superior illumination and glare control. Integral driver. OLC® One LED Concept. Advanced thermal management protects LEDs while optimizing lumens output. 0-10V Dimming comes standard with luminaire. Luminaire is factory-sealed and does not need to be opened during installation.

Luminaire can be mounted for up or down lighting. Suitable for installation on ceiling or wall over 4" recessed junction box.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX-9004 (Black)

+ XXX-XXXX (Accessory 1)

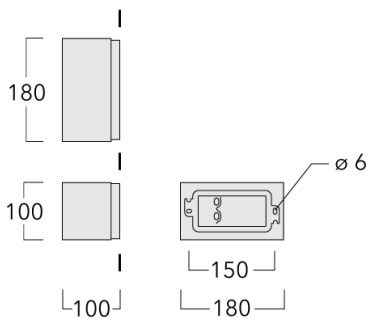

## Specifications

### Material description

|                    |                                |                                  |                                 |                              |
|--------------------|--------------------------------|----------------------------------|---------------------------------|------------------------------|
| Colors             | <b>RAL9004</b><br>Signal black | <b>RAL9007</b><br>Grey aluminium | <b>RAL9016</b><br>Traffic white | <b>RAL8019</b><br>Grey brown |
| Ingress protection | IP66                           |                                  |                                 |                              |
| Impact resistance  | IK08                           |                                  |                                 |                              |






### Electrical description

|                  |   |
|------------------|---|
| Power supply     | Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order. |
| Driver / Ballast | Standard. Optional DALI version available. To be specified at time of ordering.         |
| Surge protection | 1/2 kV  |




### Additional information

|                        |   |
|------------------------|---|
| Width x Depth (inches) | 7.09 x 3.94                             |
| Listings               | ETL listed. Suitable for wet locations. |
| Lifetime               | Ta=25°/40° L90B10 > 90000h              |

**Options**

| Light distribution   | Color temperature   | Nominal Watt  |
|--|---|---|
|  [R45] |  3000K | 6 W   |
|  |   | 9 W   |
|  |  [M]    |  4000K |
|  [E]   |   |   |

### Configurations

| Light distribution   | Part ID  | Light source    | Delivered lumens | Rated input power | CRI |
|--|----------|-----------------|------------------|-------------------|-----|
|  <p>[E]</p>      | 131-9607 | LED-3/6W/2700K  | 611.6 lm         | 6 W               | 80  |
|  | 131-9972 | LED-3/6W/3000K  | 656.9 lm         | 6 W               | 80  |
|  | 131-9973 | LED-3/6W/4000K  | 702.2 lm         | 6 W               | 80  |
|  | 131-9608 | LED-3/9W/2700K  | 986.2 lm         | 9 W               | 80  |
|  | 131-9974 | LED-3/9W/3000K  | 1034.3 lm        | 9 W               | 80  |
|  | 131-9975 | LED-3/9W/4000K  | 1082.4 lm        | 9 W               | 80  |
|  | 131-9609 | LED-3/13W/2700K | 1250.7 lm        | 13 W              | 80  |
|  | 131-9976 | LED-3/13W/3000K | 1322.9 lm        | 13 W              | 80  |
|  | 131-9977 | LED-3/13W/4000K | 1383 lm          | 13 W              | 80  |
|  <p>[M]</p>     | 131-9604 | LED-3/6W/2700K  | 650.4 lm         | 6 W               | 80  |
|  | 131-9966 | LED-3/6W/3000K  | 698.5 lm         | 6 W               | 80  |
|  | 131-9967 | LED-3/6W/4000K  | 746.7 lm         | 6 W               | 80  |
|  | 131-9605 | LED-3/9W/2700K  | 972.4 lm         | 9 W               | 80  |
|  | 131-9968 | LED-3/9W/3000K  | 1019.9 lm        | 9 W               | 80  |
|  | 131-9969 | LED-3/9W/4000K  | 1067.3 lm        | 9 W               | 80  |
|  | 131-9606 | LED-3/13W/2700K | 1233.3 lm        | 13 W              | 80  |
|  | 131-9970 | LED-3/13W/3000K | 1304.5 lm        | 13 W              | 80  |
|  | 131-9971 | LED-3/13W/4000K | 1363.8 lm        | 13 W              | 80  |
|  <p>[R45]</p> | 131-9601 | LED-3/6W/2700K  | 510.4 lm         | 6 W               | 80  |
|  | 131-9960 | LED-3/6W/3000K  | 548.2 lm         | 6 W               | 80  |
|  | 131-9961 | LED-3/6W/4000K  | 586 lm           | 6 W               | 80  |
|  | 131-9602 | LED-3/9W/2700K  | 734.3 lm         | 9 W               | 80  |
|  | 131-9962 | LED-3/9W/3000K  | 770.1 lm         | 9 W               | 80  |
|  | 131-9963 | LED-3/9W/4000K  | 805.9 lm         | 9 W               | 80  |
|  | 131-9603 | LED-3/13W/2700K | 931.3 lm         | 13 W              | 80  |
|  | 131-9964 | LED-3/13W/3000K | 985 lm           | 13 W              | 80  |
|  | 131-9965 | LED-3/13W/4000K | 1029.8 lm        | 13 W              | 80  |