





**Description**

Surface-mounted wall or ceiling luminaire.

ADA (American Disabilities Act) Compliant.


IP66. Class I. IK08. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. CAD-optimized optics for superior illumination and glare control. Integral driver. OLC® One LED Concept. Advanced thermal management protects LEDs while optimizing lumens output. 0-10V Dimming comes standard with luminaire. Luminaire is factory-sealed and does not need to be opened during installation.

Luminaire can be mounted for up or down lighting. Suitable for installation on ceiling or wall over 4" recessed junction box.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX-9004 (Black)

+ XXX-XXXX (Accessory 1)

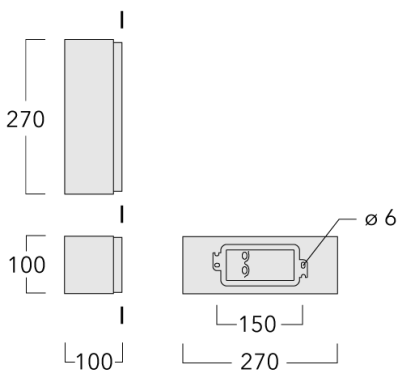

## Specifications

### Material description

Colors	<b>RAL9004</b> Signal black	<b>RAL9007</b> Grey aluminium	<b>RAL9016</b> Traffic white	<b>RAL8019</b> Grey brown
Ingress protection	IP66			
Impact resistance	IK08			







### Electrical description

Power supply	Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.
Surge protection	1/2 kV




### Additional information

Length x Width (inches)	10.63 x 3.94
Listings	ETL listed. Suitable for wet locations.
Lifetime	Ta=25°/40° L90B10 > 90000h

**Options**

Light distribution	Color temperature	Nominal Watt
 [R45]	 3000K	12 W 18 W 26 W
 [M]	 4000K	
 [E]	 2700K	

### Configurations

Light distribution	Part ID	Light source	Delivered lumens	Rated input power	CRI
 <p>[E]</p>	131-9616	LED-6/12W/2700K	1223.2 lm	12 W	80
	131-9992	LED-6/12W/3000K	1313.8 lm	12 W	80
	131-9993	LED-6/12W/4000K	1404.4 lm	12 W	80
	131-9617	LED-6/18W/2700K	1972.3 lm	18 W	80
	131-9994	LED-6/18W/3000K	2068.5 lm	18 W	80
	131-9995	LED-6/18W/4000K	2164.7 lm	18 W	80
	131-9618	LED-6/26W/2700K	2501.5 lm	26 W	80
	131-9996	LED-6/26W/3000K	2645.8 lm	26 W	80
	131-9997	LED-6/26W/4000K	2766.1 lm	26 W	80
 <p>[M]</p>	131-9613	LED-6/12W/2700K	1300.7 lm	12 W	80
	131-9986	LED-6/12W/3000K	1397.1 lm	12 W	80
	131-9987	LED-6/12W/4000K	1493.4 lm	12 W	80
	131-9614	LED-6/18W/2700K	1944.8 lm	18 W	80
	131-9988	LED-6/18W/3000K	2039.7 lm	18 W	80
	131-9989	LED-6/18W/4000K	2134.6 lm	18 W	80
	131-9615	LED-6/26W/2700K	2466.6 lm	26 W	80
	131-9990	LED-6/26W/3000K	2608.9 lm	26 W	80
	131-9991	LED-6/26W/4000K	2727.5 lm	26 W	80
 <p>[R45]</p>	131-9610	LED-6/12W/2700K	1020.8 lm	12 W	80
	131-9980	LED-6/12W/3000K	1096.4 lm	12 W	80
	131-9981	LED-6/12W/4000K	1172 lm	12 W	80
	131-9611	LED-6/18W/2700K	1468.6 lm	18 W	80
	131-9982	LED-6/18W/3000K	1540.2 lm	18 W	80
	131-9983	LED-6/18W/4000K	1611.9 lm	18 W	80
	131-9612	LED-6/26W/2700K	1862.6 lm	26 W	80
	131-9984	LED-6/26W/3000K	1970.1 lm	26 W	80
	131-9985	LED-6/26W/4000K	2059.6 lm	26 W	80