





### Description

Surface-mounted wall luminaire.

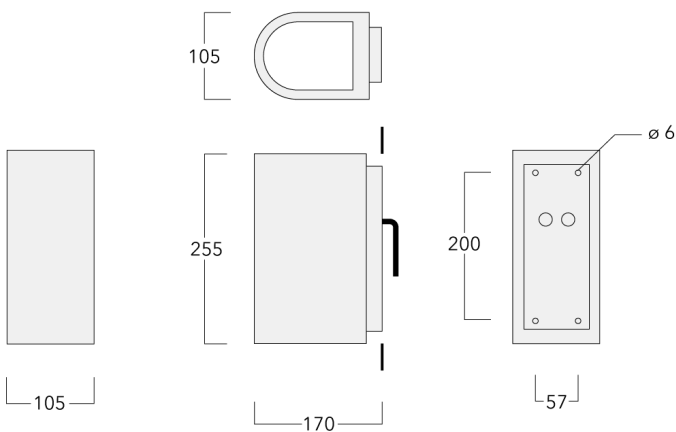
IP66. Class I. IK07. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. Two cable entries. CAD-optimized optics for superior illumination and glare control. Integral driver. OLC® One LED Concept. Factory-installed LED circuit board. 0-10V Dimming comes standard with luminaire.

Suitable for Up, Down, or Up/Down light distribution. Supplied with wall plate to fit over 4" recessed junction box.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX-9004 (Black)

+ XXX-XXXX (Accessory 1)



## Specifications

### Material description

Body	Marine-grade die-cast aluminium alloy			
Lens	Safety glass lens			
Colors	<b>RAL9004</b> Signal black	<b>RAL9016</b> Traffic white	<b>RAL8019</b> Grey brown	<b>RAL9007</b> Grey aluminium
Gasket	Silicone rubber gasket			
Fasteners	PCS Polymer Coated Stainless Steel Hardware			
Ingress protection	IP66			
Impact resistance	IK07			
Corrosion resistance	5CE			

### Electrical description













Power supply	Integral [ECG] electronic 0-10 V dimmable driver in 120-277 universal voltage.
Driver / Ballast	Standard. Optional DALI version available. To be specified at time of ordering.
Surge protection	1/2 kV
Energy efficiency	C-D (Light source)

### Additional information

Listings	ETL listed. Suitable for wet locations.
Lifetime	Ta=25°/40° L90B10 > 90000h


**Options**

**Light distribution**






-  [M] symmetric, medium beam
-  [M/M] symmetric, medium beam up and down
-  [A60] Type IV Very Short
-  [N/M] bi-symmetric, narrow beam up and medium beam down
-  [N] bi-symmetric, narrow beam
-  [E/A60] symmetric, narrow beam up and forward throw down
-  [N/N] bi-symmetric, narrow beam up and down
-  [M/A60] symmetric, medium beam up and forward throw down
-  [N/A60] bi-symmetric, narrow beam up and forward throw down
-  [E] symmetric, narrow beam
-  [E/M] symmetric, narrow beam up and medium beam down
-  [E/E] symmetric, narrow beam up and down

**Color temperature**

**Nominal Watt**

	3000K	6 W
		12 W
	4000K	3 W
		13 W
		26 W
	9W [M]	9 W
	9W [N]	18 W
	9W [A60]	
	2700K	

## Configurations






Light distribution	Part ID	Light source	Delivered lumens	Rated input power	CRI
 <p>[A60] Type IV Very Short</p>	131-0226_us	LED-2/3W/9W [A60]	386.4 lm	3 W	80
	131-0227_us	LED-2/3W/9W [A60]	404.3 lm	3 W	80
	131-9492	LED-3/6W/2700K	242.6 lm	6 W	80
	131-9472_us	LED-3/6W/3000K	260.6 lm	6 W	80
	131-9476_us	LED-3/6W/4000K	278.5 lm	6 W	80
	131-9908	LED-3/9W/2700K	368.4 lm	9 W	80
	131-9911	LED-3/13W/2700K	467.2 lm	13 W	80
	131-0232_us	LED-3/13W/3000K	494.2 lm	13 W	80
	131-0233_us	LED-3/13W/4000K	516.7 lm	13 W	80
 <p>[E] symmetric, narrow beam</p>	131-9494	LED-3/6W/2700K	611.6 lm	6 W	80
	131-9910	LED-3/9W/2700K	928.7 lm	9 W	80
	131-9913	LED-3/13W/2700K	1177.9 lm	13 W	80
 <p>[E/A60] symmetric, narrow beam up and forward throw down</p>	131-9496	LED-3/12W/2700K	854.5 lm	12 W	80
	131-9482	LED-3/12W/3000K	917.8 lm	12 W	80
	131-9488	LED-3/12W/4000K	981.1 lm	12 W	80
	131-9915	LED-3/18W/2700K	1297.5 lm	18 W	80
	131-9920	LED-3/26W/2700K	1645.7 lm	26 W	80
 <p>[E/E] symmetric, narrow beam up and down</p>	131-9499	LED-3/12W/2700K	1223.6 lm	12 W	80
	131-9918	LED-3/18W/2700K	1858 lm	18 W	80
	131-9923	LED-3/26W/2700K	2356.5 lm	26 W	80
 <p>[E/M] symmetric, narrow beam up and medium beam down</p>	131-9498	LED-3/12W/2700K	1157.9 lm	12 W	80
	131-9917	LED-3/18W/2700K	1758.3 lm	18 W	80
	131-9922	LED-3/26W/2700K	2230 lm	26 W	80
	131-0222_us	LED-2/3W/9W [M]	869.6 lm	3 W	80
	131-0223_us	LED-2/3W/9W [M]	910 lm	3 W	80



## WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 05/03/2026

Light distribution	Part ID	Light source	Delivered lumens	Rated input power	CRI
 [M] symmetric, medium beam	131-9493	LED-3/6W/2700K	546 lm	6 W	80
	131-9473_us	LED-3/6W/3000K	586.5 lm	6 W	80
	131-9477_us	LED-3/6W/4000K	626.9 lm	6 W	80
	131-9909	LED-3/9W/2700K	829.1 lm	9 W	80
	131-9912	LED-3/13W/2700K	1051.6 lm	13 W	80
	131-0228_us	LED-3/13W/3000K	1112.2 lm	13 W	80
	131-0229_us	LED-3/13W/4000K	1162.8 lm	13 W	80
 [M/A60] symmetric, medium beam up and forward throw down	131-9495	LED-3/12W/2700K	788.8 lm	12 W	80
	131-9914	LED-3/18W/2700K	1197.8 lm	18 W	80
	131-9919	LED-3/26W/2700K	1519.2 lm	26 W	80
	131-9872_us	LED-3/26W/3000K	1606.8 lm	26 W	80
	131-9877_us	LED-3/26W/4000K	1679.9 lm	26 W	80
 [M/M] symmetric, medium beam up and down	131-9497	LED-3/12W/2700K	1092.2 lm	12 W	80
	131-9483_us	LED-3/12W/3000K	1173.1 lm	12 W	80
	131-9489_us	LED-3/12W/4000K	1254 lm	12 W	80
	131-9916	LED-3/18W/2700K	1658.5 lm	18 W	80
	131-9921	LED-3/26W/2700K	2103.5 lm	26 W	80
	131-9874_us	LED-3/26W/3000K	2224.9 lm	26 W	80
	131-9879_us	LED-3/26W/4000K	2326 lm	26 W	80
 [N] bi-symmetric, narrow beam	131-0224_us	LED-2/3W/9W [N]	974 lm	3 W	80
	131-0225_us	LED-2/3W/9W [N]	1019.3 lm	3 W	80
	131-9474_us	LED-3/6W/3000K	656.9 lm	6 W	80
	131-9478_us	LED-3/6W/4000K	702.2 lm	6 W	80
	131-0230_us	LED-3/13W/3000K	1245.8 lm	13 W	80
	131-0231_us	LED-3/13W/4000K	1302.5 lm	13 W	80
	 [N/A60] bi-symmetric, narrow beam up and forward throw down	131-9873_us	LED-3/26W/3000K	1740.6 lm	26 W
131-9878_us		LED-3/26W/4000K	1819.7 lm	26 W	80
131-9484_us		LED-3/12W/3000K	1243.7 lm	12 W	80
	131-9490_us	LED-3/12W/4000K	1329.4 lm	12 W	80

Light distribution	Part ID	Light source	Delivered lumens	Rated input power	CRI
 <p>[N/M] bi-symmetric, narrow beam up and medium beam down</p>	131-9875_us	LED-3/26W/3000K	2358.7 lm	26 W	80
	131-9880_us	LED-3/26W/4000K	2465.9 lm	26 W	80
 <p>[N/N] bi-symmetric, narrow beam up and down</p>	131-9485_us	LED-3/12W/3000K	1314.2 lm	12 W	80
	131-9491_us	LED-3/12W/4000K	1404.8 lm	12 W	80
	131-9876_us	LED-3/26W/3000K	2492.4 lm	26 W	80
	131-9881_us	LED-3/26W/4000K	2605.7 lm	26 W	80