





Description

Surface-mounted wall luminaire.

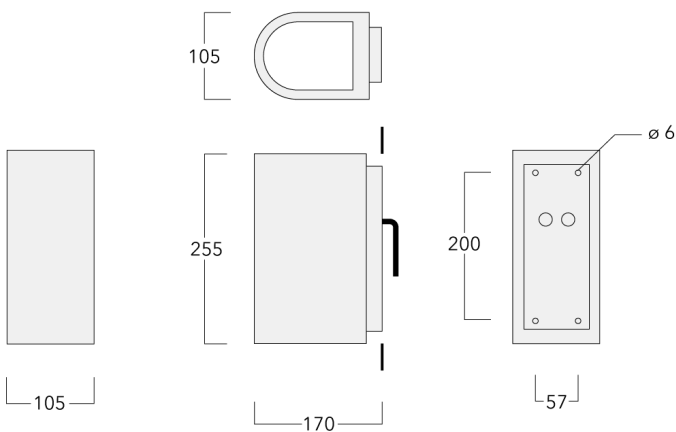
IP66. Class I. IK07. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. Two cable entries. CAD-optimized optics for superior illumination and glare control. Integral driver. OLC® One LED Concept. Factory-installed LED circuit board. 0-10V Dimming comes standard with luminaire.

Suitable for Up, Down, or Up/Down light distribution. Supplied with wall plate to fit over 4" recessed junction box.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX-9004 (Black)

+ XXX-XXXX (Accessory 1)



Specifications

Material description

Body	Marine-grade die-cast aluminium alloy			
Lens	Safety glass lens			
Colors	RAL9004 Signal black	RAL9016 Traffic white	RAL8019 Grey brown	RAL9007 Grey aluminium
Gasket	Silicone rubber gasket			
Fasteners	PCS Polymer Coated Stainless Steel Hardware			
Ingress protection	IP66			
Impact resistance	IK07			
Corrosion resistance	5CE			

Electrical description













Power supply	Integral [ECG] electronic 0-10 V dimmable driver in 120-277 universal voltage.
Driver / Ballast	Standard. Optional DALI version available. To be specified at time of ordering.
Surge protection	1/2 kV
Energy efficiency	C-D (Light source)

Additional information

Listings	ETL listed. Suitable for wet locations.
Lifetime	Ta=25°/40° L90B10 > 90000h


Options

Light distribution






-  [M] symmetric, medium beam
-  [M/M] symmetric, medium beam up and down
-  [A60] Type IV Very Short
-  [N/M] bi-symmetric, narrow beam up and medium beam down
-  [N] bi-symmetric, narrow beam
-  [E/A60] symmetric, narrow beam up and forward throw down
-  [N/N] bi-symmetric, narrow beam up and down
-  [M/A60] symmetric, medium beam up and forward throw down
-  [N/A60] bi-symmetric, narrow beam up and forward throw down
-  [E] symmetric, narrow beam
-  [E/M] symmetric, narrow beam up and medium beam down
-  [E/E] symmetric, narrow beam up and down

Color temperature

Nominal Watt

	3000K	6 W
		12 W
	4000K	3 W
		13 W
		26 W
	9W [M]	9 W
	9W [N]	18 W
	9W [A60]	
	2700K	

Configurations






Light distribution	Part ID	Light source	Delivered lumens	Rated input power	CRI
 <p>[A60] Type IV Very Short</p>	131-0226_us	LED-2/3W/9W [A60]	386.4 lm	3 W	80
	131-0227_us	LED-2/3W/9W [A60]	404.3 lm	3 W	80
	131-9492	LED-3/6W/2700K	242.6 lm	6 W	80
	131-9472_us	LED-3/6W/3000K	260.6 lm	6 W	80
	131-9476_us	LED-3/6W/4000K	278.5 lm	6 W	80
	131-9908	LED-3/9W/2700K	368.4 lm	9 W	80
	131-9911	LED-3/13W/2700K	467.2 lm	13 W	80
	131-0232_us	LED-3/13W/3000K	494.2 lm	13 W	80
	131-0233_us	LED-3/13W/4000K	516.7 lm	13 W	80
 <p>[E] symmetric, narrow beam</p>	131-9494	LED-3/6W/2700K	611.6 lm	6 W	80
	131-9910	LED-3/9W/2700K	928.7 lm	9 W	80
	131-9913	LED-3/13W/2700K	1177.9 lm	13 W	80
 <p>[E/A60] symmetric, narrow beam up and forward throw down</p>	131-9496	LED-3/12W/2700K	854.5 lm	12 W	
	131-9482	LED-3/12W/3000K	917.8 lm	12 W	
	131-9488	LED-3/12W/4000K	981.1 lm	12 W	
	131-9915	LED-3/18W/2700K	1297.5 lm	18 W	
	131-9920	LED-3/26W/2700K	1645.7 lm	26 W	
 <p>[E/E] symmetric, narrow beam up and down</p>	131-9499	LED-3/12W/2700K	1223.6 lm	12 W	
	131-9918	LED-3/18W/2700K	1858 lm	18 W	
	131-9923	LED-3/26W/2700K	2356.5 lm	26 W	
 <p>[E/M] symmetric, narrow beam up and medium beam down</p>	131-9498	LED-3/12W/2700K	1157.9 lm	12 W	
	131-9917	LED-3/18W/2700K	1758.3 lm	18 W	
	131-9922	LED-3/26W/2700K	2230 lm	26 W	
	131-0222_us	LED-2/3W/9W [M]	869.6 lm	3 W	80
	131-0223_us	LED-2/3W/9W [M]	910 lm	3 W	80



WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 05/20/2026

Light distribution	Part ID	Light source	Delivered lumens	Rated input power	CRI
 [M] symmetric, medium beam	131-9493	LED-3/6W/2700K	546 lm	6 W	80
	131-9473_us	LED-3/6W/3000K	586.5 lm	6 W	80
	131-9477_us	LED-3/6W/4000K	626.9 lm	6 W	80
	131-9909	LED-3/9W/2700K	829.1 lm	9 W	80
	131-9912	LED-3/13W/2700K	1051.6 lm	13 W	80
	131-0228_us	LED-3/13W/3000K	1112.2 lm	13 W	80
	131-0229_us	LED-3/13W/4000K	1162.8 lm	13 W	80
 [M/A60] symmetric, medium beam up and forward throw down	131-9495	LED-3/12W/2700K	788.8 lm	12 W	
	131-9914	LED-3/18W/2700K	1197.8 lm	18 W	
	131-9919	LED-3/26W/2700K	1519.2 lm	26 W	
	131-9872_us	LED-3/26W/3000K	1606.8 lm	26 W	
	131-9877_us	LED-3/26W/4000K	1679.9 lm	26 W	
 [M/M] symmetric, medium beam up and down	131-9497	LED-3/12W/2700K	1092.2 lm	12 W	
	131-9483_us	LED-3/12W/3000K	1173.1 lm	12 W	
	131-9489_us	LED-3/12W/4000K	1254 lm	12 W	
	131-9916	LED-3/18W/2700K	1658.5 lm	18 W	
	131-9921	LED-3/26W/2700K	2103.5 lm	26 W	
	131-9874_us	LED-3/26W/3000K	2224.9 lm	26 W	
	131-9879_us	LED-3/26W/4000K	2326 lm	26 W	
 [N] bi-symmetric, narrow beam	131-0224_us	LED-2/3W/9W [N]	974 lm	3 W	80
	131-0225_us	LED-2/3W/9W [N]	1019.3 lm	3 W	80
	131-9474_us	LED-3/6W/3000K	656.9 lm	6 W	80
	131-9478_us	LED-3/6W/4000K	702.2 lm	6 W	80
	131-0230_us	LED-3/13W/3000K	1245.8 lm	13 W	80
	131-0231_us	LED-3/13W/4000K	1302.5 lm	13 W	80
	 [N/A60] bi-symmetric, narrow beam up and forward throw down	131-9873_us	LED-3/26W/3000K	1740.6 lm	26 W
131-9878_us		LED-3/26W/4000K	1819.7 lm	26 W	
131-9484_us		LED-3/12W/3000K	1243.7 lm	12 W	
	131-9490_us	LED-3/12W/4000K	1329.4 lm	12 W	

Light distribution	Part ID	Light source	Delivered lumens	Rated input power	CRI
 <p>[N/M] bi-symmetric, narrow beam up and medium beam down</p>	131-9875_us	LED-3/26W/3000K	2358.7 lm	26 W	
	131-9880_us	LED-3/26W/4000K	2465.9 lm	26 W	
 <p>[N/N] bi-symmetric, narrow beam up and down</p>	131-9485_us	LED-3/12W/3000K	1314.2 lm	12 W	
	131-9491_us	LED-3/12W/4000K	1404.8 lm	12 W	
	131-9876_us	LED-3/26W/3000K	2492.4 lm	26 W	
	131-9881_us	LED-3/26W/4000K	2605.7 lm	26 W	