





Description

Surface-mounted wall luminaire.

IP66. Class I. IK07.

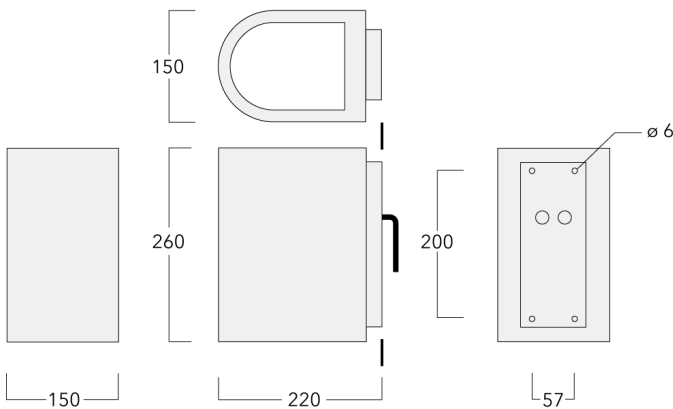
Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. Two cable entries. CAD-optimized optics for superior illumination and glare control. Integral driver. OLC® One LED Concept. Factory-installed LED circuit board. 0-10V Dimming comes standard with luminaire.

Suitable for Up, Down, or Up/Down light distribution. Suitable for installation over 4" recessed junction box. Emergency Lighting Package option available; to be specified as accessory with order.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX-9004 (Black)
+ XXX-XXXX (Accessory 1)

For DarkSky compliant configurations of this product,



please find the spec sheet and DarkSky certificate in the library.

Specifications

Material description

Body	Marine-grade die-cast aluminium alloy			
Lens	Safety glass lens			
Colors	RAL9004 Signal black	RAL9016 Traffic white	RAL8019 Grey brown	RAL9007 Grey aluminium
Gasket	Silicone rubber gasket			
Fasteners	PCS Polymer Coated Stainless Steel Hardware			
Ingress protection	IP66			
Impact resistance	IK07			
Corrosion resistance	5CE			

Electrical description













Power supply	Integral [ECG] electronic 0-10 V dimmable driver in 120-277 universal voltage.
Driver / Ballast	Standard. Optional DALI version available. To be specified at time of ordering.
Surge protection	1/2 kV (optional SP10)
Energy efficiency	C-D (Light source)

Additional information

Listings	ETL listed. Suitable for wet locations.
Lifetime	Ta=25°/40° L90B10 > 90000h




Options

Light distribution






-  [M] symmetric, medium beam
-  [N] bi-symmetric, narrow beam
-  [A60] Type IV Very Short
-  [N/A60] bi-symmetric, narrow beam up and forward throw down
-  [M/M] symmetric, medium beam up and down
-  [N/M] bi-symmetric, narrow beam up and medium beam down
-  [N/N] bi-symmetric, narrow beam up and down
-  [M/A60] symmetric, medium beam up and forward throw down
-  [E/M] symmetric, narrow beam up and medium beam down
-  [E] symmetric, narrow beam
-  [E/E] symmetric, narrow beam up and down
-  [E/A60] symmetric, narrow beam up and forward throw down






Color temperature

Nominal Watt

	3000K	12 W
		24 W
	4000K	18 W
		36 W
	2700K	26 W
		52 W

Configurations

Light distribution	Part ID	Light source	Delivered lumens	Rated input power	CRI
 <p>[A60] Type IV Very Short</p>	131-9310	LED-6/12W/2700K	794 lm	12 W	80
	131-9532_us	LED-6/12W/3000K	852.9 lm	12 W	80
	131-9536_us	LED-6/12W/4000K	911.7 lm	12 W	80
	131-9256	LED-6/18W/2700K	1205.8 lm	18 W	80
	131-0238_us	LED-6/18W/3000K	1264.6 lm	18 W	80
	131-0239_us	LED-6/18W/4000K	1323.4 lm	18 W	80
	131-9265	LED-6/26W/2700K	1529.2 lm	26 W	80
	131-0244_us	LED-6/26W/3000K	1617.5 lm	26 W	80
	131-0245_us	LED-6/26W/4000K	1691 lm	26 W	80
 <p>[E] symmetric, narrow beam</p>	131-9312	LED-6/12W/2700K	1223.2 lm	12 W	80
	131-9258	LED-6/18W/2700K	1857.4 lm	18 W	80
	131-9267	LED-6/26W/2700K	2355.8 lm	26 W	80
 <p>[E/A60] symmetric, narrow beam up and forward throw down</p>	131-9314	LED-6/24W/2700K	2017.7 lm	24 W	80
	131-9341	LED-6/36W/2700K	3063.9 lm	36 W	80
	131-9346	LED-6/52W/2700K	3886 lm	52 W	80
 <p>[E/E] symmetric, narrow beam up and down</p>	131-9317	LED-6/24W/2700K	2447.1 lm	24 W	80
	131-9344	LED-6/36W/2700K	3716 lm	36 W	80
	131-9349	LED-6/52W/2700K	4712.9 lm	52 W	80
 <p>[E/M] symmetric, narrow beam up and medium beam down</p>	131-9316	LED-6/24W/2700K	2315.8 lm	24 W	80
	131-9343	LED-6/36W/2700K	3516.5 lm	36 W	80
	131-9348	LED-6/52W/2700K	4460 lm	52 W	80
	131-9311	LED-6/12W/2700K	1092 lm	12 W	80
	131-9533_us	LED-6/12W/3000K	1172.9 lm	12 W	80



Light distribution	Part ID	Light source	Delivered lumens	Rated input power	CRI
 [M] symmetric, medium beam	131-9537_us	LED-6/12W/4000K	1253.8 lm	12 W	80
	131-9257	LED-6/18W/2700K	1658.3 lm	18 W	80
	131-0234_us	LED-6/18W/3000K	1739.1 lm	18 W	80
	131-0235_us	LED-6/18W/4000K	1820 lm	18 W	80
	131-9266	LED-6/26W/2700K	2103.2 lm	26 W	80
	131-0240_us	LED-6/26W/3000K	2224.5 lm	26 W	80
	131-0241_us	LED-6/26W/4000K	2325.6 lm	26 W	80
 [M/A60] symmetric, medium beam up and forward throw down	131-9313	LED-6/24W/2700K	1886.4 lm	24 W	80
	131-9340	LED-6/36W/2700K	2864.5 lm	36 W	80
	131-9798_us	LED-6/36W/3000K	3004.2 lm	36 W	80
	131-9803_us	LED-6/36W/4000K	3144 lm	36 W	80
	131-9345	LED-6/52W/2700K	3633 lm	52 W	80
	131-9808_us	LED-6/52W/3000K	3842.6 lm	52 W	80
	131-9813_us	LED-6/52W/4000K	4017.3 lm	52 W	80
 [M/M] symmetric, medium beam up and down	131-9315	LED-6/24W/2700K	2184.4 lm	24 W	80
	131-9543_us	LED-6/24W/3000K	2346.2 lm	24 W	80
	131-9549_us	LED-6/24W/4000K	2508.1 lm	24 W	80
	131-9342	LED-6/36W/2700K	3317.1 lm	36 W	80
	131-9800_us	LED-6/36W/3000K	3478.9 lm	36 W	80
	131-9805_us	LED-6/36W/4000K	3640.7 lm	36 W	80
	131-9347	LED-6/52W/2700K	4207.1 lm	52 W	80
	131-9810_us	LED-6/52W/3000K	4449.8 lm	52 W	80
	131-9815_us	LED-6/52W/4000K	4652 lm	52 W	80
	 [N] bi-symmetric, narrow beam	131-9534_us	LED-6/12W/3000K	1313.8 lm	12 W
131-9538_us		LED-6/12W/4000K	1404.4 lm	12 W	80
131-0236_us		LED-6/18W/3000K	1948 lm	18 W	80
131-0237_us		LED-6/18W/4000K	2038.6 lm	18 W	80
131-0242_us		LED-6/26W/3000K	2491.7 lm	26 W	80
131-0243_us		LED-6/26W/4000K	2604.9 lm	26 W	80
	131-9542_us	LED-6/24W/3000K	2167.2 lm	24 W	80
	131-9548_us	LED-6/24W/4000K	2316.6 lm	24 W	80
	131-9799_us	LED-6/36W/3000K	3213.4 lm	36 W	80
	131-9804_us	LED-6/36W/4000K	3362.8 lm	36 W	80

WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 05/03/2026

Light distribution	Part ID	Light source	Delivered lumens	Rated input power	CRI
[N/A60] bi-symmetric, narrow beam up and forward throw down	131-9809_us	LED-6/52W/3000K	4110.1 lm	52 W	80
	131-9814_us	LED-6/52W/4000K	4297 lm	52 W	80
 [N/M] bi-symmetric, narrow beam up and medium beam down	131-9544_us	LED-6/24W/3000K	2487.3 lm	24 W	80
	131-9550_us	LED-6/24W/4000K	2658.8 lm	24 W	80
	131-9801_us	LED-6/36W/3000K	3688.1 lm	36 W	80
	131-9806_us	LED-6/36W/4000K	3859.6 lm	36 W	80
	131-9811_us	LED-6/52W/3000K	4717.3 lm	52 W	80
 [N/N] bi-symmetric, narrow beam up and down	131-9816_us	LED-6/52W/4000K	4931.7 lm	52 W	80
	131-9545_us	LED-6/24W/3000K	2628.4 lm	24 W	80
	131-9551_us	LED-6/24W/4000K	2809.6 lm	24 W	80
	131-9802_us	LED-6/36W/3000K	3897.2 lm	36 W	80
	131-9807_us	LED-6/36W/4000K	4078.5 lm	36 W	80
	131-9812_us	LED-6/52W/3000K	4984.8 lm	52 W	80
	131-9817_us	LED-6/52W/4000K	5211.4 lm	52 W	80