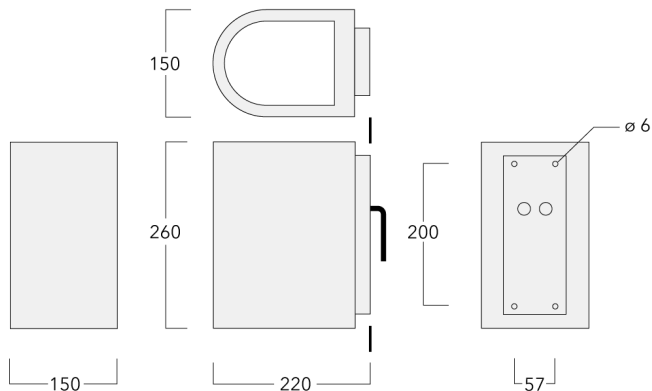






#### Description

IP66, Class I. Class II on request. IK07. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Silicone rubber gasket. Safety glass lens. Two cable entries. Integral EC electronic converter. CAD-optimised optics for superior illumination and glare control. OLC® One LED Concept. Factory installed LED circuit board. 1-10V or DALI interface on request. Optional 2200 K version up to max. 1050mA available. To be specified at time of ordering.



## Specifications

### Material description

Body	Marine-grade die-cast aluminium alloy			
Lens	Safety glass lens			
Colours	<b>RAL9004</b> Signal black	<b>RAL9006</b> White aluminium	<b>RAL9016</b> Traffic white	<b>RAL7016</b> Anthracite grey
	<b>RAL9007</b> Grey aluminium			
Gasket	Silicone rubber gasket			
Fasteners	PCS Polymer Coated Stainless Steel Hardware			
Ingress protection	IP66			
Impact resistance	IK07			
Corrosion resistance	5CE			

### Electrical description

Power supply	220-240V / 50-60 Hz
Driver / Ballast	Standard. Optional DALI version available. To be specified at time of ordering.
Surge protection	1/2 kV (optional SP10)
Energy efficiency	C-D (Light source)

### Additional information

Lifetime	Ta=25° L90B10 > 90000h
----------	------------------------

**Options****Light distribution**

[M]



[E]



[A60] asymmetric, forward throw



[E/A60]



[M/M]



[E/M]



[E/E]

**Colour temperature**

3000K



4000K



2700K

**Nominal Watt**






12 W



24 W

18 W

26 W

## Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI
 <p>[A60] asymmetric, forward throw</p>	131-9310	LED-6/12W/2700K	794 lm	12 W	80
	131-9532	LED-6/12W/3000K	852.9 lm	12 W	80
	131-9536	LED-6/12W/4000K	911.7 lm	12 W	80
	131-9256	LED-6/18W/2700K	1205.8 lm	18 W	80
	131-0238	LED-6/18W/3000K	1264.6 lm	18 W	80
	131-0239	LED-6/18W/4000K	1323.4 lm	18 W	80
	131-9265	LED-6/26W/2700K	1529.2 lm	26 W	80
	131-0244	LED-6/26W/3000K	1617.5 lm	26 W	80
	131-0245	LED-6/26W/4000K	1691 lm	26 W	80
 <p>[E]</p>	131-9312	LED-6/12W/2700K	1223.2 lm	12 W	80
	131-9534	LED-6/12W/3000K	1313.8 lm	12 W	80
	131-9538	LED-6/12W/4000K	1404.4 lm	12 W	80
	131-9258	LED-6/18W/2700K	1857.4 lm	18 W	80
	131-0236	LED-6/18W/3000K	1948 lm	18 W	80
	131-0237	LED-6/18W/4000K	2038.6 lm	18 W	80
	131-9267	LED-6/26W/2700K	2355.8 lm	26 W	80
	131-0242	LED-6/26W/3000K	2491.7 lm	26 W	80
	131-0243	LED-6/26W/4000K	2604.9 lm	26 W	80
 <p>[E/A60]</p>	131-9314	LED-6/24W/2700K	2017.7 lm	24 W	80
	131-9542	LED-6/24W/3000K	2167.2 lm	24 W	80
	131-9548	LED-6/24W/4000K	2316.6 lm	24 W	80
 <p>[E/E]</p>	131-9317	LED-6/24W/2700K	2447.1 lm	24 W	80
	131-9545	LED-6/24W/3000K	2628.4 lm	24 W	80
	131-9551	LED-6/24W/4000K	2809.6 lm	24 W	80
 <p>[E/M]</p>	131-9316	LED-6/24W/2700K	2315.8 lm	24 W	80
	131-9544	LED-6/24W/3000K	2487.3 lm	24 W	80
	131-9550	LED-6/24W/4000K	2658.8 lm	24 W	80
	131-9311	LED-6/12W/2700K	1092 lm	12 W	80
	131-9533	LED-6/12W/3000K	1172.9 lm	12 W	80
	131-9537	LED-6/12W/4000K	1253.8 lm	12 W	80

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI
 [M]	131-9257	LED-6/18W/2700K	1658.3 lm	18 W	80
	131-0234	LED-6/18W/3000K	1739.1 lm	18 W	80
	131-0235	LED-6/18W/4000K	1820 lm	18 W	80
	131-9266	LED-6/26W/2700K	2103.2 lm	26 W	80
	131-0240	LED-6/26W/3000K	2224.5 lm	26 W	80
	131-0241	LED-6/26W/4000K	2325.6 lm	26 W	80
 [M/M]	131-9315	LED-6/24W/2700K	2184.4 lm	24 W	80
	131-9543	LED-6/24W/3000K	2346.2 lm	24 W	80
	131-9549	LED-6/24W/4000K	2508.1 lm	24 W	80