





Description

Surface-mounted wall luminaire.

IP66. Class I. IK07.

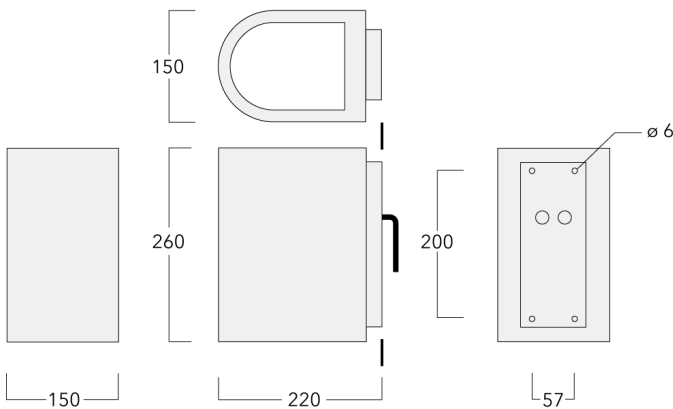
Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. Two cable entries. CAD-optimized optics for superior illumination and glare control. Integral driver. OLC® One LED Concept. Factory-installed LED circuit board. 0-10V Dimming comes standard with luminaire.

Suitable for Up, Down, or Up/Down light distribution. Suitable for installation over 4" recessed junction box. Emergency Lighting Package option available; to be specified as accessory with order.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX-9004 (Black)
+ XXX-XXXX (Accessory 1)

For DarkSky compliant configurations of this product,



please find the spec sheet and DarkSky certificate in the library.

Specifications

Material description

Body	Marine-grade die-cast aluminium alloy			
Lens	Safety glass lens			
Colors	RAL9004 Signal black	RAL9016 Traffic white	RAL8019 Grey brown	RAL9007 Grey aluminium
Gasket	Silicone rubber gasket			
Fasteners	PCS Polymer Coated Stainless Steel Hardware			
Ingress protection	IP66			
Impact resistance	IK07			
Corrosion resistance	5CE			












Electrical description

Power supply	Integral [ECG] electronic 0-10 V dimmable driver in 120-277 universal voltage.
Driver / Ballast	Standard. Optional DALI version available. To be specified at time of ordering.
Surge protection	1/2 kV (optional SP10)
Energy efficiency	C-D (Light source)





Additional information

Height x Depth (inches)	10.24 x 8.66
Listings	ETL listed. Suitable for wet locations.
Lifetime	Ta=25°/40° L90B10 > 90000h

Options

Light distribution	Color temperature	Nominal Watt
 [M]	 3000K	12 W
		24 W
 [E]	 4000K	18 W
		36 W
 [A60] Type IV Very Short	 2700K	26 W
		52 W
 [E/A60]		
 [M/M]		
 [E/M]		
 [E/E]		
 [M/A60]		

Configurations





Light distribution	Part ID	Light source	Delivered lumens	Rated input power	CRI
 [A60] Type IV Very Short	131-9310	LED-6/12W/2700K	794 lm	12 W	80
	131-9532	LED-6/12W/3000K	852.9 lm	12 W	80
	131-9536	LED-6/12W/4000K	911.7 lm	12 W	80
	131-9256	LED-6/18W/2700K	1205.8 lm	18 W	80
	131-0238	LED-6/18W/3000K	1264.6 lm	18 W	80
	131-0239	LED-6/18W/4000K	1323.4 lm	18 W	80
	131-9265	LED-6/26W/2700K	1529.2 lm	26 W	80
	131-0244	LED-6/26W/3000K	1617.5 lm	26 W	80
	131-0245	LED-6/26W/4000K	1691 lm	26 W	80
 [E]	131-9312	LED-6/12W/2700K	1223.2 lm	12 W	80
	131-9534	LED-6/12W/3000K	1313.8 lm	12 W	80
	131-9538	LED-6/12W/4000K	1404.4 lm	12 W	80
	131-9258	LED-6/18W/2700K	1857.4 lm	18 W	80
	131-0236	LED-6/18W/3000K	1948 lm	18 W	80
	131-0237	LED-6/18W/4000K	2038.6 lm	18 W	80
	131-9267	LED-6/26W/2700K	2355.8 lm	26 W	80
	131-0242	LED-6/26W/3000K	2491.7 lm	26 W	80
	131-0243	LED-6/26W/4000K	2604.9 lm	26 W	80
 [E/A60]	131-9314	LED-6/24W/2700K	2017.7 lm	24 W	80
	131-9542	LED-6/24W/3000K	2167.2 lm	24 W	80
	131-9548	LED-6/24W/4000K	2316.6 lm	24 W	80
	131-9341	LED-6/36W/2700K	3063.9 lm	36 W	80
	131-9799	LED-6/36W/3000K	3213.4 lm	36 W	80
	131-9804	LED-6/36W/4000K	3362.8 lm	36 W	80
	131-9346	LED-6/52W/2700K	3886 lm	52 W	80
	131-9809	LED-6/52W/3000K	4110.1 lm	52 W	80
	131-9814	LED-6/52W/4000K	4297 lm	52 W	80
 [E/E]	131-9317	LED-6/24W/2700K	2447.1 lm	24 W	80
	131-9545	LED-6/24W/3000K	2628.4 lm	24 W	80
	131-9551	LED-6/24W/4000K	2809.6 lm	24 W	80
	131-9344	LED-6/36W/2700K	3716 lm	36 W	80
	131-9802	LED-6/36W/3000K	3897.2 lm	36 W	80

WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 04/11/2026

Light distribution	Part ID	Light source	Delivered lumens	Rated input power	CRI
 [E/M]	131-9807	LED-6/36W/4000K	4078.5 lm	36 W	80
	131-9349	LED-6/52W/2700K	4712.9 lm	52 W	80
	131-9812	LED-6/52W/3000K	4984.8 lm	52 W	80
	131-9817	LED-6/52W/4000K	5211.4 lm	52 W	80
	131-9316	LED-6/24W/2700K	2315.8 lm	24 W	80
	131-9544	LED-6/24W/3000K	2487.3 lm	24 W	80
	131-9550	LED-6/24W/4000K	2658.8 lm	24 W	80
	131-9343	LED-6/36W/2700K	3516.5 lm	36 W	80
	131-9801	LED-6/36W/3000K	3688.1 lm	36 W	80
	131-9806	LED-6/36W/4000K	3859.6 lm	36 W	80
 [M]	131-9348	LED-6/52W/2700K	4460 lm	52 W	80
	131-9811	LED-6/52W/3000K	4717.3 lm	52 W	80
	131-9816	LED-6/52W/4000K	4931.7 lm	52 W	80
	131-9311	LED-6/12W/2700K	1092 lm	12 W	80
	131-9533	LED-6/12W/3000K	1172.9 lm	12 W	80
	131-9537	LED-6/12W/4000K	1253.8 lm	12 W	80
	131-9257	LED-6/18W/2700K	1658.3 lm	18 W	80
	131-0234	LED-6/18W/3000K	1739.1 lm	18 W	80
	131-0235	LED-6/18W/4000K	1820 lm	18 W	80
	131-9266	LED-6/26W/2700K	2103.2 lm	26 W	80
 [M/A60]	131-0240	LED-6/26W/3000K	2224.5 lm	26 W	80
	131-0241	LED-6/26W/4000K	2325.6 lm	26 W	80
	131-9313	LED-6/24W/2700K	1886.4 lm	24 W	80
	131-9340	LED-6/36W/2700K	2864.5 lm	36 W	80
	131-9798	LED-6/36W/3000K	3004.2 lm	36 W	80
	131-9803	LED-6/36W/4000K	3144 lm	36 W	80
	131-9345	LED-6/52W/2700K	3633 lm	52 W	80
	131-9808	LED-6/52W/3000K	3842.6 lm	52 W	80
	131-9813	LED-6/52W/4000K	4017.3 lm	52 W	80
	 [E]	131-9315	LED-6/24W/2700K	2184.4 lm	24 W
131-9543		LED-6/24W/3000K	2346.2 lm	24 W	80
131-9549		LED-6/24W/4000K	2508.1 lm	24 W	80
131-9342		LED-6/36W/2700K	3317.1 lm	36 W	80

Light distribution	Part ID	Light source	Delivered lumens	Rated input power	CRI
[M/M]	131-9800	LED-6/36W/3000K	3478.9 lm	36 W	80
	131-9805	LED-6/36W/4000K	3640.7 lm	36 W	80
	131-9347	LED-6/52W/2700K	4207.1 lm	52 W	80
	131-9810	LED-6/52W/3000K	4449.8 lm	52 W	80
	131-9815	LED-6/52W/4000K	4652 lm	52 W	80