

Description

Vandal-resistant, grated steplight.


ADA (American Disabilities Act) Compliant.

IP55. Class I. IK10. Marine-grade, die-cast aluminum alloy housing, with polished stainless-steel frame. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Polycarbonate main lens. Two cable entries. Integral driver. Factory-installed LED circuit board. 0-10V Dimming standard.

A pre-installation blockout is available and recommended for mounting in concrete walls; to be ordered separately.


Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX-9004 (Black)
+ XXX-XXXX (Accessory 1)

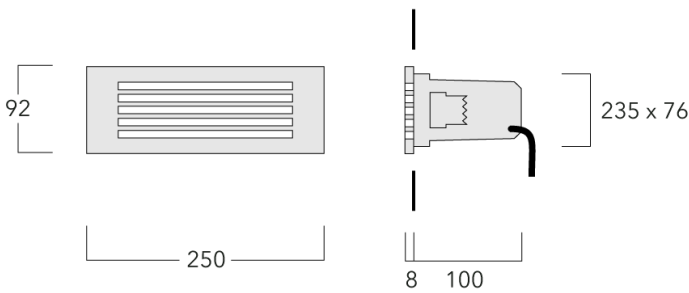

Specifications

Material description

| | |
|----------------------|--|
| Body | Luminaire body constructed in die cast aluminum. |
| Lens | Opal polycarbonate lens. |
| Colors |  Stainless Steel |
| Gasket | Silicone rubber gasket |
| Fasteners | PCS polymer coated stainless steel |
| Ingress protection | IP55 |
| Impact resistance | IK10 |
| Corrosion resistance | 5CE |

Electrical description

| | |
|-------------------|---|
| Power supply | Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order. |
| Driver / Ballast | Integral EC electronic converter |
| Surge protection | 1/2 kV |
| Energy efficiency | C-D (Light source) |

Additional information

| | |
|----------|---|
| Listings | ETL listed. Suitable for wet locations. |
| Lifetime | Ta=25°/40° L80B10 > 54000h |

Options

Light distribution **Color temperature** **Nominal Watt**

[]

0 W

6 W



2700K

Configurations

| Light distribution | Part ID | Light source | Delivered lumens | Rated input power | CRI |
|--------------------|-------------|----------------|------------------|-------------------|-----|
| [] | 133-0345_us | | 94.9 lm | 0 W | 80 |
| | 133-0346_us | | 104.1 lm | 0 W | 80 |
| | 133-0452 | LED-6/6W/2700K | 88.8 lm | 6 W | 80 |