

**Description**

Vandal-resistant, grated steplight.


ADA (American Disabilities Act) Compliant.

IP55. Class I. IK10. Marine-grade, die-cast aluminum alloy housing, with polished stainless-steel frame. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Polycarbonate main lens. Two cable entries. Integral driver. Factory-installed LED circuit board. 0-10V Dimming standard.

A pre-installation blockout is available and recommended for mounting in concrete walls; to be ordered separately.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.


Example: XXX-XXXX-9004 (Black)  
+ XXX-XXXX (Accessory 1)

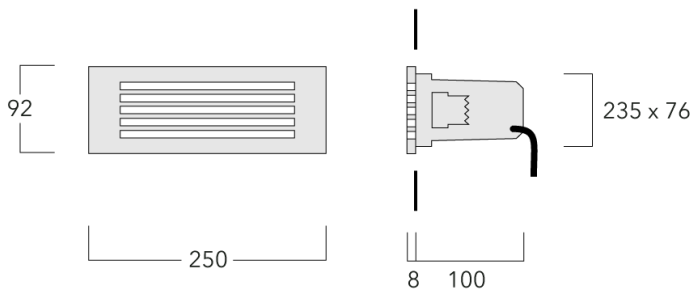

## Specifications

### Material description

---

Body	Luminaire body constructed in die cast aluminum.
Lens	Opal polycarbonate lens.
Colors	 Stainless Steel
Gasket	Silicone rubber gasket
Fasteners	PCS polymer coated stainless steel
Ingress protection	IP55
Impact resistance	IK10
Corrosion resistance	5CE

---

### Electrical description

---

Power supply	Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.
Driver / Ballast	Integral EC electronic converter
Surge protection	1/2 kV
Energy efficiency	C-D (Light source)

---




### Additional information

---

Length x Width (inches)	9.84 x 3.62
Listings	ETL listed. Suitable for wet locations.
Lifetime	Ta=25°/40° L80B10 > 54000h

---

**Options**

Light distribution	Color temperature	Nominal Watt
□	 3000K	6 W
	 4000K	
	 2700K	

## Configurations

Light distribution	Part ID	Light source	Delivered lumens	Rated input power	CRI
□	133-0452	LED-6/6W/2700K	88.8 lm	6 W	80
	133-0345	LED-6/6W/3000K	94.9 lm	6 W	80
	133-0346	LED-6/6W/4000K	104.1 lm	6 W	80