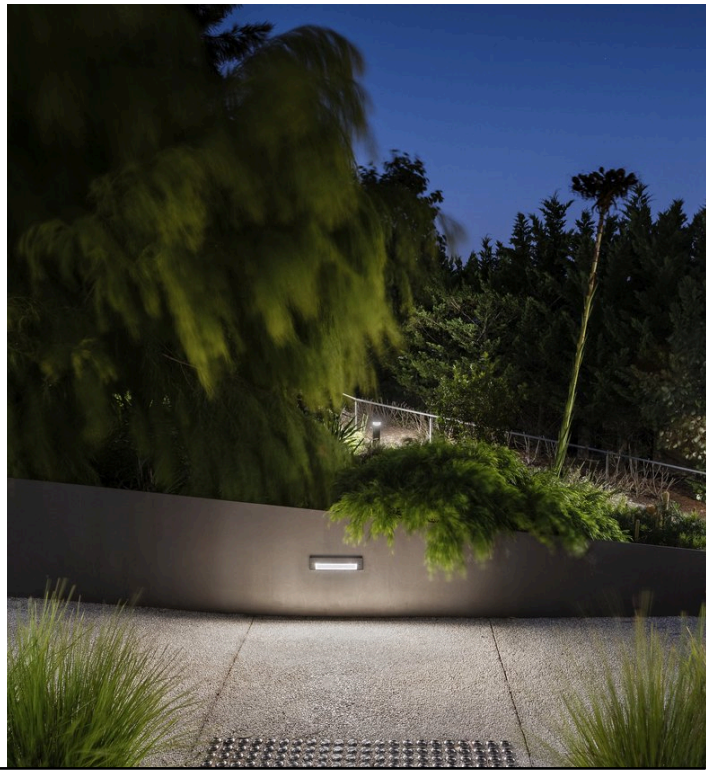

Recessed Wall Luminaires

STI134 LED

IP66, Class I. Class II on request. IK10. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Polycarbonate main lens. Silicone rubber gasket. Luminaire is factory-sealed and does not need to be opened during installation.

Integral EC electronic converter. Advanced thermal management protects LEDs while optimising lumens output. Two cable entries.

Pre-installation blockout is recommended for mounting in concrete, available on request.

Version with emergency lighting on request.

6 W	161 – 181 lm	IK10
Wattage	Rated lumens	IP / IK

Lighting

Light distribution	Colour temperature	Wattage
[]	2700K	6 W
	3000K	
	4000K	

Physical description

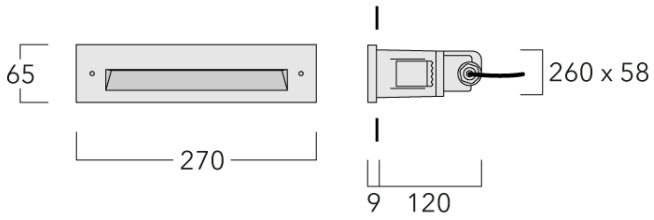

Length	270 mm
Width	65 mm
Depth	120 mm
Weight	0.9 kg
Body	Marine-grade die-cast aluminium alloy
Lens	Polycarbonate
Colours	RAL9004 Signal black; RAL9006 White aluminium; RAL9016 Traffic white; RAL7016 Anthracite grey; RAL9007 Grey aluminium
Finish	Powdercoat finish in RAL 9004, RAL 9006, RAL 9007 and RAL 9016
Gasket	Silicone rubber gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware
Impact resistance	IK10
Corrosion resistance	5CE

Electrical description

Power supply	220-240V / 50-60 Hz
Driver / Ballast	Integral EC electronic converter
Cable	Two cable entries
Surge protection	1-2/2 kV
Energy efficiency	C (Light source)

Additional information

Lifetime	Ta=25° L80B10 > 54000h

Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI
[]	190-9037	LED-6W/2700K	161.1 lm	8 W	80
	190-9008	LED-6W/3000K	170.9 lm	8 W	80
	190-9009	LED-6W/4000K	180.7 lm	8 W	80

Recessed Wall Luminaires

STI134 LED

we-ef

A Fagerhult Group Company

Fagerhult Lighting Ltd
33-34 Dolben Street, SE1 0UQ London, United Kingdom
https://we-ef.com/uk

Subject to technical changes and errors.