


**Description**

IP66. IK10. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Polycarbonate main lens. Silicone rubber gasket. Luminaire is factory-sealed and does not need to be opened during installation. Factory-installed with 30 cm of flexible halogen-free cable.

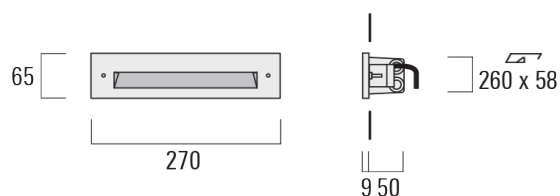

Integral EC electronic converter. Advanced thermal management protects LEDs while optimising lumens output. One cable entry. Second cable entry for through wiring available on request.

## Specifications

### Material description

Colours	<b>RAL9004</b> Signal black	<b>RAL9007</b> Grey aluminium	<b>RAL7016</b> Anthracite grey	<b>RAL9016</b> Traffic white
Ingress protection	IP66			
Impact resistance	IK10			

### Electrical description

Power supply	220-240V / 50-60 Hz
Driver / Ballast	Integral EC electronic converter

### Additional information

**Options**

Light distribution	Colour temperature	Nominal Watt
□	3K SD	6 W
	4K SD	
	2.7K SD	

## Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI
[]	190-9062	LED-2/6W/2.7K SD	161.1 lm	6 W	80
	190-9007	LED-2/6W/3K SD	170.9 lm	6 W	80
	190-9057	LED-2/6W/4K SD	180.7 lm	6 W	80