


**Description**

IP66. IK10. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Polycarbonate main lens. Silicone rubber gasket. Luminaire is factory-sealed and does not need to be opened during installation. Factory-installed with 30 cm of flexible halogen-free cable.

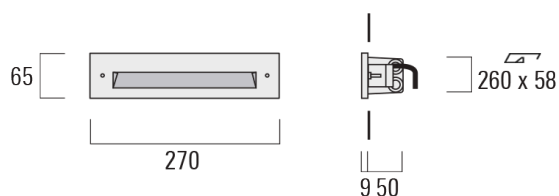

Integral EC electronic converter. Advanced thermal management protects LEDs while optimising lumens output. One cable entry. Second cable entry for through wiring available on request.

Specifications

Material description

Colours	RAL9004 Signal black	RAL9007 Grey aluminium	RAL7016 Anthracite grey	RAL9016 Traffic white
Ingress protection	IP66			
Impact resistance	IK10			

Electrical description

Power supply	220-240V / 50-60 Hz
Driver / Ballast	Integral EC electronic converter

Additional information

Options

Light distribution	Colour temperature	Nominal Watt
□	3K SD	6 W
	4K SD	
	2.7K SD	

Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI
[]	190-9062	LED-2/6W/2.7K SD	161.1 lm	6 W	80
	190-9007	LED-2/6W/3K SD	170.9 lm	6 W	80
	190-9057	LED-2/6W/4K SD	180.7 lm	6 W	80