
**Description**

IP66, Class I. IK10. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection + primer including PCS hardware. Silicone rubber gasket. Safety glass lens. Two cable entries. Factory installed LED circuit board. Integral EC electronic converter.

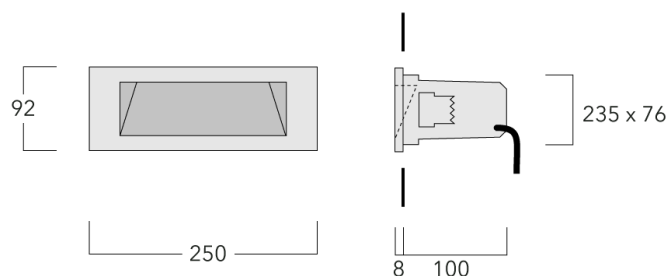

A pre-installation blockout is available and recommended for mounting in concrete walls. To be ordered separately.

## Specifications

### Material description

---

Body	Marine-grade die-cast aluminium alloy						
Lens	Safety glass lens						
Colours	<table><tr><td><b>RAL9004</b></td><td><b>RAL9006</b></td><td><b>RAL9007</b></td></tr><tr><td>Signal black</td><td>White aluminium</td><td>Grey aluminium</td></tr></table>	<b>RAL9004</b>	<b>RAL9006</b>	<b>RAL9007</b>	Signal black	White aluminium	Grey aluminium
<b>RAL9004</b>	<b>RAL9006</b>	<b>RAL9007</b>					
Signal black	White aluminium	Grey aluminium					
Gasket	Silicone rubber gasket						
Fasteners	PCS Polymer Coated Stainless Steel Hardware (unpainted)						
Ingress protection	IP66						
Impact resistance	IK10						
Corrosion resistance	5CE+Primer						

---

### Electrical description

---

Power supply	230V / 50 Hz
Driver / Ballast	Integral EC electronic converter
Surge protection	1/2 kV
Energy efficiency	The product is supplied with 10-year warranty. Please refer to the LED Warranty Statement located on <a href="http://www.we-ef.com">www.we-ef.com</a> for further details.

---

### Additional information

---

Lifetime	Ta=40° L80B10 > 54000h
----------	------------------------

---

**Options**

**Light distribution**    **Colour temperature**    **Nominal Watt**

[]



3000K

9 W



4000K

## Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI
□	133-0405	LED-18/9W/3000K	360.7 lm	9 W	80
	133-0404	LED-18/9W/4000K	383.6 lm	9 W	80