


Description

IP66, Class I. Class II on request. IK10. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Silicone rubber gasket. Safety glass lens. Two cable entries. Factory installed LED circuit board. Integral EC electronic converter.

A pre-installation blockout is available and recommended for mounting in concrete walls. To be ordered separately.

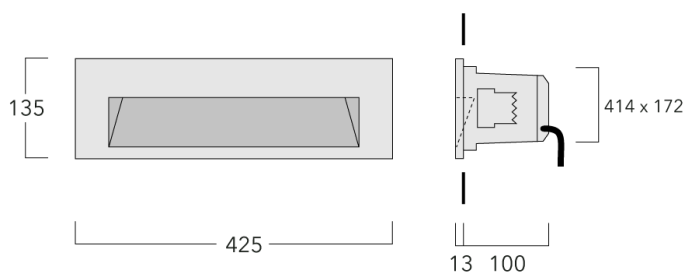

Specifications

Material description

Body	Marine-grade die-cast aluminium alloy			
Lens	Safety glass lens			
Colours	RAL9004 Signal black	RAL9006 White aluminium	RAL9016 Traffic white	RAL7016 Anthracite grey
	RAL9007 Grey aluminium			
Gasket	Silicone rubber gasket			
Fasteners	PCS Polymer Coated Stainless Steel Hardware			
Ingress protection	IP66			
Impact resistance	IK10			
Corrosion resistance	5CE			

Electrical description

Power supply	220-240V / 50-60 Hz
Driver / Ballast	Integral EC electronic converter
Surge protection	1/2 kV
Energy efficiency	C (Light source)

Additional information

Lifetime	Ta=25° L80B10 > 54000h
----------	------------------------

Options

Light distribution **Colour temperature** **Nominal Watt**

[]



3000K

8 W



4000K

Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI
[]	133-0402	LED-2/8W/3000K	355.9 lm	8 W	80
	133-0403	LED-2/8W/4000K	384.8 lm	8 W	80