






Description

IP66. IK07. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Polycarbonate main lens. Silicone rubber gasket. Luminaire is factory-sealed and does not need to be opened during installation.

Integral EC electronic converter. Advanced thermal management protects LEDs while optimising lumens output. Two cable entries.

Pre-installation blackout is recommended for mounting in concrete, available on request.

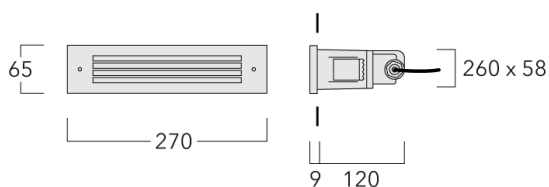

Specifications

Material description

| | | | | |
|----------------------|---------------------------------------|----------------|-----------------|----------------|
| Body | Marine-grade die-cast aluminium alloy | | | |
| Lens | Polycarbonate | | | |
| Colours | RAL9004 | RAL9016 | RAL7016 | RAL9007 |
| | Signal black | Traffic white | Anthracite grey | Grey aluminium |
| Gasket | Silicone rubber gasket | | | |
| Fasteners | PCS hardware | | | |
| Ingress protection | IP66 | | | |
| Impact resistance | IK07 | | | |
| Corrosion resistance | 5CE | | | |

Electrical description

| | |
|-------------------|----------------------------------|
| Power supply | 220-240V / 50-60 Hz |
| Driver / Ballast | Integral EC electronic converter |
| Surge protection | 1-2/2 kV |
| Energy efficiency | C (Light source) |

Additional information

| | |
|----------|------------------------|
| Lifetime | Ta=25° L80B10 > 54000h |
|----------|------------------------|

Options

Light distribution **Colour temperature** **Nominal Watt**

[]



3000K

6 W



4000K



2700K

Configurations

| Light distribution | Part ID | Light source | Rated lumens | Rated input power | CRI |
|--------------------|----------|----------------|--------------|-------------------|-----|
| [] | 190-9036 | LED-2/6W/2700K | 23.8 lm | 6 W | 80 |
| | 190-9005 | LED-2/6W/3000K | 25.2 lm | 6 W | 80 |
| | 190-9006 | LED-2/6W/4000K | 26.6 lm | 6 W | 80 |