


Description

IP55, Class I. Class II on request. IK10. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Silicone rubber gasket. Polycarbonate main lens. Two cable entries. Factory installed LED circuit board. Integral EC electronic converter. Optional 2200 K version available. To be specified at time of ordering.

A pre-installation blockout is available and recommended for mounting in concrete walls. To be ordered separately.

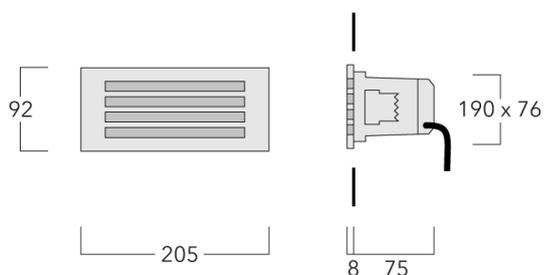

Specifications

Material description

| | | | | |
|----------------------|---|-----------------------------------|---------------------------------|-----------------------------------|
| Body | Marine-grade die-cast aluminium alloy | | | |
| Lens | Polycarbonate lens | | | |
| Colours | RAL9004 Signal black | RAL9006 White aluminium | RAL9016 Traffic white | RAL7016 Anthracite grey |
| | RAL9007 Grey aluminium | | | |
| Gasket | Silicone rubber gasket | | | |
| Fasteners | PCS Polymer Coated Stainless Steel Hardware | | | |
| Ingress protection | IP55 | | | |
| Impact resistance | IK10 | | | |
| Corrosion resistance | 5CE | | | |

Electrical description

| | |
|-------------------|----------------------------------|
| Power supply | 220-240V / 50-60 Hz |
| Driver / Ballast | Integral EC electronic converter |
| Surge protection | 1/2 kV |
| Energy efficiency | C (Light source) |

Additional information

| | |
|----------|------------------------|
| Lifetime | Ta=25° L80B10 > 54000h |
|----------|------------------------|

Options

Light distribution **Colour temperature** **Nominal Watt**

[]



3000K

4 W



4000K



2700K

Configurations

| Light distribution | Part ID | Light source | Rated lumens | Rated input power | CRI |
|--------------------|----------|----------------|--------------|-------------------|-----|
| [] | 133-0453 | LED-4/4W/2700K | 16 lm | 4 W | 80 |
| | 133-0324 | LED-4/4W/3000K | 17.1 lm | 4 W | 80 |
| | 133-0335 | LED-4/4W/4000K | 18.7 lm | 4 W | 80 |