






### Description

IP55, Class I, IK10. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection + primer including PCS hardware. Silicone rubber gasket. Polycarbonate main lens. Two cable entries. Factory installed LED circuit board. Integral EC electronic converter. Optional 2200 K version available. To be specified at time of ordering.

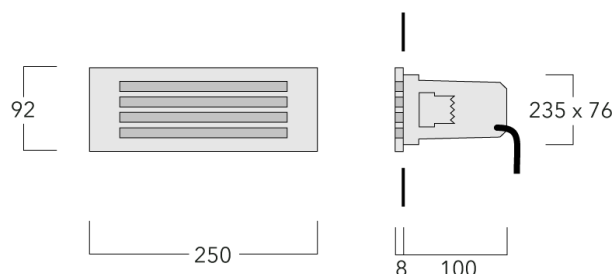

A pre-installation blockout is available and recommended for mounting in concrete walls. To be ordered separately.

## Specifications

### Material description

---

|                      |  |                |                |                |              |                 |                |
|----------------------|--|----------------|----------------|----------------|--------------|-----------------|----------------|
| Body                 | Marine-grade die-cast aluminium alloy  |                |                |                |              |                 |                |
| Lens                 | Polycarbonate lens   |                |                |                |              |                 |                |
| Colours              | <table><tr><td><b>RAL9004</b></td><td><b>RAL9006</b></td><td><b>RAL9007</b></td></tr><tr><td>Signal black</td><td>White aluminium</td><td>Grey aluminium</td></tr></table> | <b>RAL9004</b> | <b>RAL9006</b> | <b>RAL9007</b> | Signal black | White aluminium | Grey aluminium |
| <b>RAL9004</b>       | <b>RAL9006</b>   | <b>RAL9007</b> |                |                |              |                 |                |
| Signal black         | White aluminium  | Grey aluminium |                |                |              |                 |                |
| Gasket               | Silicone rubber gasket   |                |                |                |              |                 |                |
| Fasteners            | PCS Polymer Coated Stainless Steel Hardware (unpainted)  |                |                |                |              |                 |                |
| Ingress protection   | IP55   |                |                |                |              |                 |                |
| Impact resistance    | IK10   |                |                |                |              |                 |                |
| Corrosion resistance | 5CE+Primer   |                |                |                |              |                 |                |

---

### Electrical description

---

|                   |  |
|-------------------|--|
| Power supply      | 230V / 50 Hz   |
| Driver / Ballast  | Integral EC electronic converter   |
| Surge protection  | 1/2 kV   |
| Energy efficiency | The product is supplied with 10-year warranty. Please refer to the LED Warranty Statement located on <a href="http://www.we-ef.com">www.we-ef.com</a> for further details. |

---

### Additional information

---

|          |                        |
|----------|------------------------|
| Lifetime | Ta=40° L80B10 > 54000h |
|----------|------------------------|

---

**Options**

**Light distribution**    **Colour temperature**    **Nominal Watt**

[]



3000K

6 W



4000K



2700K

## Configurations

| Light distribution | Part ID  | Light source   | Rated lumens | Rated input power | CRI |
|--------------------|----------|----------------|--------------|-------------------|-----|
| []                 | 133-0454 | LED-6/6W/2700K | 23.9 lm      | 6 W               | 80  |
|                    | 133-0308 | LED-6/6W/3000K | 25.6 lm      | 6 W               | 80  |
|                    | 133-0347 | LED-6/6W/4000K | 28.1 lm      | 6 W               | 80  |