




Description


IP66, Class I. Class II on request. IK07. Marine-grade, die-cast aluminium alloy with polished stainless steel frame. 5CE superior corrosion protection including PCS hardware. Silicone rubber gasket. Polycarbonate main lens. Two cable entries.

Pre-installation blockout is recommended for mounting in concrete, available on request.

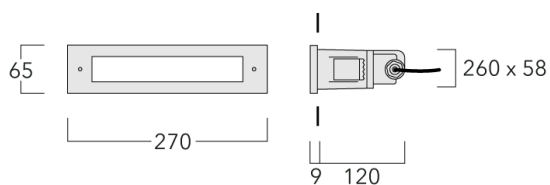

Specifications

Material description

Body	Marine-grade die-cast aluminium alloy
Lens	Polycarbonate
Colours	 Stainless Steel
Gasket	Silicone rubber gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware
Ingress protection	IP66
Impact resistance	IK07
Corrosion resistance	5CE

Electrical description

Power supply	220-240V / 50-60 Hz
Driver / Ballast	Integral EC electronic converter
Surge protection	1-2/2 kV
Energy efficiency	C-D (Light source)

Additional information

Lifetime	Ta=25° L80B10 > 54000h
----------	------------------------

Options


Light distribution **Colour temperature** **Nominal Watt**

[]



3000K

5 W



4000K



2700K

Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI
[]	190-9039	LED-2/5W/2700K	75.4 lm	5 W	80
	190-9014	LED-2/5W/3000K	78.6 lm	5 W	80
	190-9015	LED-2/5W/4000K	81.7 lm	5 W	80