






Description

IP66, Class I. Class II on request. IK07. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Silicone rubber gasket. Polycarbonate main lens. Two cable entries.

Pre-installation blackout is recommended for mounting in concrete, available on request.

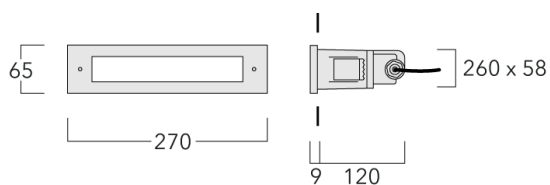

Specifications

Material description

| | | | | | | | | | | | | | | | | | |
|----------------------|--|----------------|-----------------|----------------|----------------|--------------|-----------------|---------------|-----------------|----------------|--|--|--|----------------|--|--|--|
| Body | Marine-grade die-cast aluminium alloy | | | | | | | | | | | | | | | | |
| Lens | Polycarbonate | | | | | | | | | | | | | | | | |
| Colours | <table><tr><td>RAL9004</td><td>RAL9006</td><td>RAL9016</td><td>RAL7016</td></tr><tr><td>Signal black</td><td>White aluminium</td><td>Traffic white</td><td>Anthracite grey</td></tr><tr><td>RAL9007</td><td></td><td></td><td></td></tr><tr><td>Grey aluminium</td><td></td><td></td><td></td></tr></table> | RAL9004 | RAL9006 | RAL9016 | RAL7016 | Signal black | White aluminium | Traffic white | Anthracite grey | RAL9007 | | | | Grey aluminium | | | |
| RAL9004 | RAL9006 | RAL9016 | RAL7016 | | | | | | | | | | | | | | |
| Signal black | White aluminium | Traffic white | Anthracite grey | | | | | | | | | | | | | | |
| RAL9007 | | | | | | | | | | | | | | | | | |
| Grey aluminium | | | | | | | | | | | | | | | | | |
| Gasket | Silicone rubber gasket | | | | | | | | | | | | | | | | |
| Fasteners | PCS Polymer Coated Stainless Steel Hardware | | | | | | | | | | | | | | | | |
| Ingress protection | IP66 | | | | | | | | | | | | | | | | |
| Impact resistance | IK07 | | | | | | | | | | | | | | | | |
| Corrosion resistance | 5CE | | | | | | | | | | | | | | | | |




Electrical description

| | |
|-------------------|----------------------------------|
| Power supply | 220-240V / 50-60 Hz |
| Driver / Ballast | Integral EC electronic converter |
| Surge protection | 1-2/2 kV |
| Energy efficiency | C-D (Light source) |

Additional information

| | |
|----------|------------------------|
| Lifetime | Ta=25° L80B10 > 54000h |
|----------|------------------------|

Options

| Light distribution | Colour temperature | Nominal Watt |
|--------------------|---|--------------|
| □ |  3000K | 5 W |
| |  4000K | |
| |  2700K | |

Configurations

| Light distribution | Part ID | Light source | Rated lumens | Rated input power | CRI |
|--------------------|----------|----------------|--------------|-------------------|-----|
| [] | 190-9035 | LED-2/5W/2700K | 75.4 lm | 5 W | 80 |
| | 190-9002 | LED-2/5W/3000K | 78.6 lm | 5 W | 80 |
| | 190-9003 | LED-2/5W/4000K | 81.7 lm | 5 W | 80 |