


**Description**

IP66. IK07. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Polycarbonate main lens. Silicone rubber gasket. Luminaire is factory-sealed and does not need to be opened during installation. Factory-installed with 30 cm of flexible halogen-free cable.

Integral EC electronic converter. Advanced thermal management protects LEDs while optimising lumens output. One cable entry.

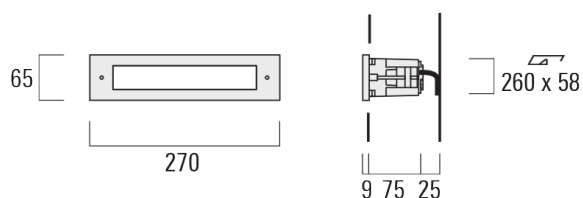

## Specifications

### Material description

Colours	<b>RAL9004</b> Signal black	<b>RAL9007</b> Grey aluminium	<b>RAL9016</b> Traffic white	<b>RAL7016</b> Anthracite grey
Ingress protection	IP66			
Impact resistance	IK07			

### Electrical description

Power supply	220-240V / 50-60 Hz
Driver / Ballast	Integral EC electronic converter

### Additional information

**Options**

Light distribution	Colour temperature	Nominal Watt
□	3K RD	5 W
	4K RD	
	2.7K RD	

## Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI
[]	190-9049	LED-2/5W/2.7K RD	75.4 lm	5 W	80
	190-9041	LED-2/5W/3K RD	78.6 lm	5 W	80
	190-9045	LED-2/5W/4K RD	81.7 lm	5 W	80