




**Description**

IP66. IK07. Marine-grade, die-cast aluminium alloy, with polished stainless steel frame. 5CE superior corrosion protection including PCS hardware. Polycarbonate main lens. Silicone rubber gasket. Luminaire is factory-sealed and does not need to be opened during installation. Factory-installed with 30 cm of flexible halogen-free cable.

Integral EC electronic converter. Advanced thermal management protects LEDs while optimising lumens output. One cable entry.

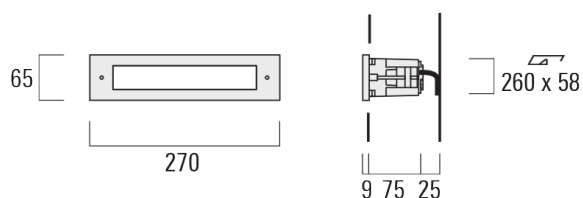

## Specifications

### Material description

---

Colours



Stainless Steel

Ingress protection IP66

Impact resistance IK07

---

### Electrical description

---




Power supply 220-240V / 50-60 Hz

Driver / Ballast Integral EC electronic converter

---

### Additional information

**Options**

Light distribution	Colour temperature	Nominal Watt
□	 3000K	5 W
	 4000K	
	 2700K	

## Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI
[]	190-9052	LED-2/5W/2700K	75.4 lm	5 W	80
	190-9044	LED-2/5W/3000K	78.6 lm	5 W	80
	190-9048	LED-2/5W/4000K	81.7 lm	5 W	80