



Description

Low-glare, diffused steplight.


ADA (American Disabilities Act) Compliant.

IP55. Class I. IK10. Marine-grade, die-cast aluminum alloy housing, with polished stainless-steel frame. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Opal polycarbonate main lens. Two cable entries. Integral driver. Factory-installed LED circuit board. 0-10V Dimming standard.

A pre-installation blockout is available and recommended for mounting in concrete walls; to be ordered separately.


Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX-9004 (Black)
+ XXX-XXXX (Accessory 1)

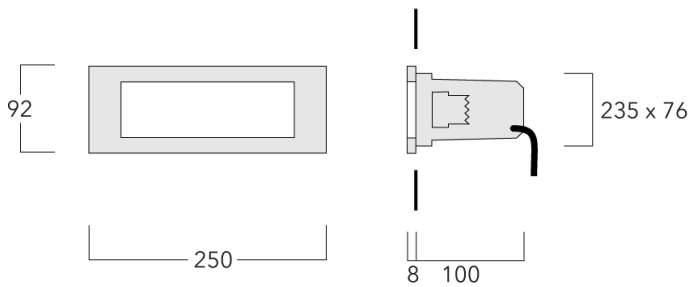

Specifications

Material description

Body	Luminaire body constructed in die cast aluminum.
Lens	Opal polycarbonate lens.
Colors	 <p>Stainless Steel</p>
Gasket	Silicone rubber gasket
Fasteners	PCS polymer coated stainless steel
Ingress protection	IP55
Impact resistance	IK10
Corrosion resistance	5CE

Electrical description

Power supply	Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.
Driver / Ballast	Integral EC electronic converter
Surge protection	1/2 kV
Energy efficiency	C-D (Light source)

Additional information

Length x Width (inches)	9.84 x 3.62
Listings	ETL listed. Suitable for wet locations.
Lifetime	Ta=25°/40° L80B10 > 54000h

Options

Light distribution **Color temperature** **Nominal Watt**

[]

 3000K

 4000K

 2700K

9 W

Configurations

Light distribution	Part ID	Light source	Delivered lumens	Rated input power	CRI
□	133-0446	LED-6/9W/2700K	283 lm	9 W	80
	133-0319	LED-6/9W/3000K	304.2 lm	9 W	80
	133-0342	LED-6/9W/4000K	325.4 lm	9 W	80