


Description

IP66, Class I. Class II on request. IK10. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Silicone rubber gasket. Polycarbonate main lens. Two cable entries. Factory installed LED circuit board. Integral EC electronic converter. Optional 2200 K version available. To be specified at time of ordering.

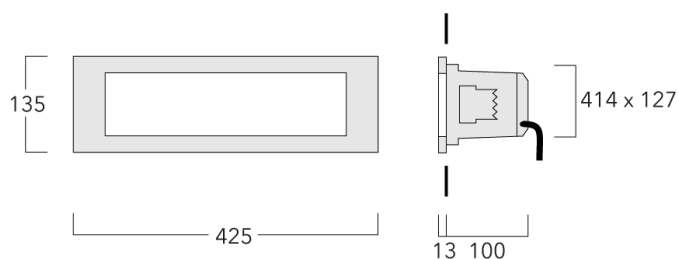

A pre-installation blockout is available and recommended for mounting in concrete walls. To be ordered separately.

Specifications

Material description

Body	Marine-grade die-cast aluminium alloy			
Lens	Polycarbonate lens			
Colours	RAL9004 Signal black	RAL9006 White aluminium	RAL9016 Traffic white	RAL7016 Anthracite grey
	RAL9007 Grey aluminium			
Gasket	Silicone rubber gasket			
Fasteners	PCS Polymer Coated Stainless Steel Hardware			
Ingress protection	IP66			
Impact resistance	IK10			
Corrosion resistance	5CE			




Electrical description

Power supply	220-240V / 50-60 Hz
Driver / Ballast	Integral EC electronic converter
Surge protection	1/2 kV
Energy efficiency	C-D (Light source)

Additional information

Listings	Special version with VA stainless steel frame available
Lifetime	Ta=25° L80B10 > 54000h

Options

Light distribution	Colour temperature	Nominal Watt
□	 3000K	21 W
	 4000K	
	 2700K	

Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI
[]	133-0447	LED-9/21W/2700K	747.5 lm	21 W	80
	133-0352	LED-9/21W/3000K	802.5 lm	21 W	80
	133-0353	LED-9/21W/4000K	857.4 lm	21 W	80