

Description

Low-glare, diffused steplight.

ADA (American Disabilities Act) Compliant.


IP66. Class I. IK10. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Powdercoat Finish. Silicone CCG® Controlled Compression Gasket. Opal polycarbonate main lens. Two cable entries. Integral driver. Factory-installed LED circuit board. 0-10V Dimming standard.

A pre-installation blockout is available and recommended for mounting in concrete walls; to be ordered separately.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX-9004 (Black)

+ XXX-XXXX (Accessory 1)

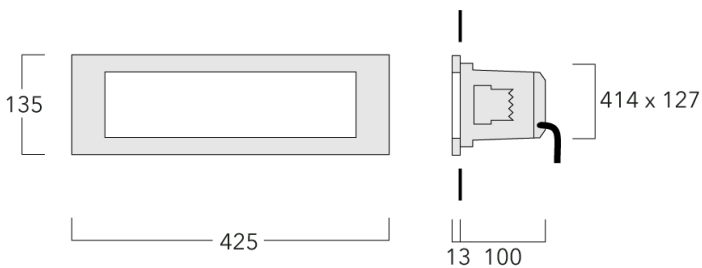

Specifications

Material description

Body	Luminaire body and lens frame constructed in die cast aluminum.			
Lens	Opal polycarbonate lens.			
Colors	RAL9004	RAL9016	RAL8019	RAL9007
	Signal black	Traffic white	Grey brown	Grey aluminium
Gasket	Silicone rubber gasket			
Fasteners	PCS polymer coated stainless steel			
Ingress protection	IP66			
Impact resistance	IK10			
Corrosion resistance	5CE			

Electrical description

Power supply	Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.
Driver / Ballast	Integral EC electronic converter
Surge protection	1/2 kV
Energy efficiency	C-D (Light source)


Additional information

Length x Width (inches)	16.73 x 5.32
Listings	ETL listed. Suitable for wet locations.
Lifetime	Ta=25°/40° L80B10 > 54000h

Options


Light distribution **Color temperature** **Nominal Watt**

[]



3000K

21 W



4000K



2700K

Configurations

Light distribution	Part ID	Light source	Delivered lumens	Rated input power	CRI
□	133-0447	LED-9/21W/2700K	747.5 lm	21 W	80
	133-0352	LED-9/21W/3000K	802.5 lm	21 W	80
	133-0353	LED-9/21W/4000K	857.4 lm	21 W	80