**Description**

Low glare steplight.

ADA (American Disabilities Act) Compliant.


IP55. Class I. IK10. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Polycarbonate main lens. Two cable entries. Integral driver. Factory-installed LED circuit board. 0-10V Dimming standard.

A pre-installation blockout is available and recommended for mounting in concrete walls; to be ordered separately.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX-9004 (Black)

+ XXX-XXXX (Accessory 1)

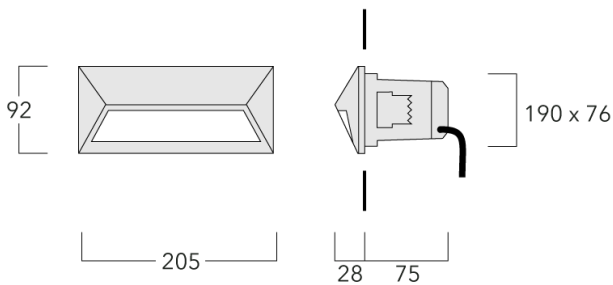

Specifications

Material description

| | | | | |
|----------------------|---|---------------------------------|------------------------------|----------------------------------|
| Body | Luminaire body and lens frame constructed in die cast aluminum. | | | |
| Lens | Prismatic polycarbonate lens. | | | |
| Colors | RAL9004 Signal black | RAL9016 Traffic white | RAL8019 Grey brown | RAL9007 Grey aluminium |
| Gasket | Silicone rubber gasket | | | |
| Fasteners | PCS polymer coated stainless steel | | | |
| Ingress protection | IP55 | | | |
| Impact resistance | IK10 | | | |
| Corrosion resistance | 5CE | | | |

Electrical description

| | |
|-------------------|---|
| Power supply | Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order. |
| Driver / Ballast | Integral EC electronic converter |
| Surge protection | 1/2 kV |
| Energy efficiency | C-D (Light source) |


Additional information

| | |
|----------------------------|---|
| Length x Width (inches) | 8.07 x 3.62 |
| Listings | ETL listed. Suitable for wet locations. |
| Lifetime | Ta=25°/40° L80B10 > 54000h |

Options


Light distribution **Color temperature** **Nominal Watt**

[]



3000K

4 W



4000K



2700K

Configurations

| Light distribution | Part ID | Light source | Delivered lumens | Rated input power | CRI |
|--------------------|----------|----------------|------------------|-------------------|-----|
| □ | 133-0455 | LED-4/4W/2700K | 131.9 lm | 4 W | 80 |
| | 133-0338 | LED-4/4W/3000K | 141 lm | 4 W | 80 |
| | 133-0339 | LED-4/4W/4000K | 154.6 lm | 4 W | 80 |