





Description

Low glare steplight.

ADA (American Disabilities Act) Compliant.


IP55. Class I. IK10. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Polycarbonate main lens. Two cable entries. Integral driver. Factory-installed LED circuit board. 0-10V Dimming standard.

A pre-installation blockout is available and recommended for mounting in concrete walls; to be ordered separately.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX-9004 (Black)

+ XXX-XXXX (Accessory 1)

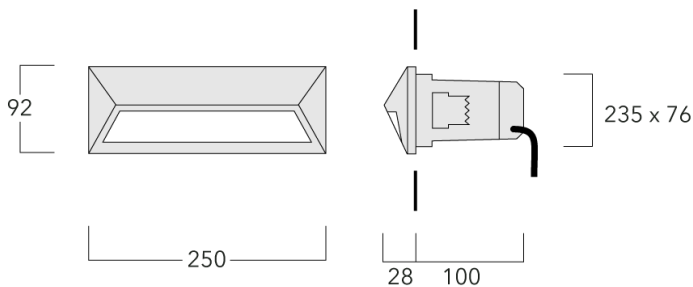

Specifications

Material description

Body	Luminaire body and lens frame constructed in die cast aluminum.			
Lens	Prismatic polycarbonate lens.			
Colors	RAL9004 Signal black	RAL9016 Traffic white	RAL8019 Grey brown	RAL9007 Grey aluminium
Gasket	Silicone rubber gasket			
Fasteners	PCS polymer coated stainless steel			
Ingress protection	IP55			
Impact resistance	IK10			
Corrosion resistance	5CE			




Electrical description

Power supply	Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.
Driver / Ballast	Integral EC electronic converter
Surge protection	1/2 kV
Energy efficiency	C-D (Light source)

Additional information

Length x Width (inches)	9.84 x 3.62
Listings	ETL listed. Suitable for wet locations.
Lifetime	Ta=25°/40° L80B10 > 54000h

Options

Light distribution	Color temperature	Nominal Watt
□	 3000K	6 W
	 4000K	
	 2700K	

Configurations

Light distribution	Part ID	Light source	Delivered lumens	Rated input power	CRI
□	133-0456	LED-6/6W/2700K	197.8 lm	6 W	80
	133-0350	LED-6/6W/3000K	211.5 lm	6 W	80
	133-0351	LED-6/6W/4000K	232 lm	6 W	80