





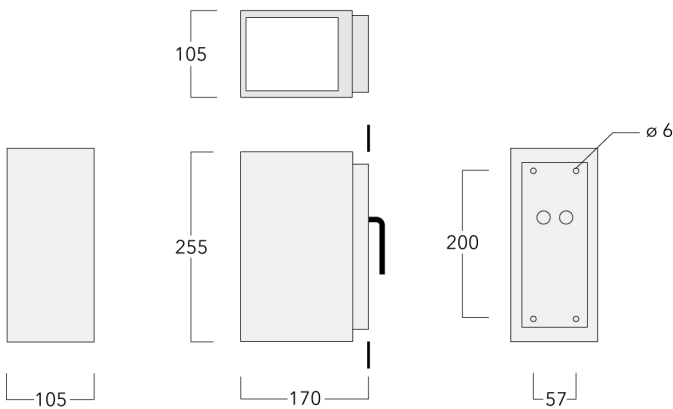
Description

IP66. Class I. IK07. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. Two cable entries. CAD-optimized optics for superior illumination and glare control. Integral driver. OLC® One LED Concept. Factory-installed LED circuit board. 0-10V Dimming comes standard with luminaire.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX-9004 (Black)

+ XXX-XXXX (Accessory 1)



Specifications

Material description

Body	Luminaire body and lens frame constructed in die cast aluminum.			
Lens	Clear tempered glass lens.			
Colors	RAL9004 Signal black	RAL9016 Traffic white	RAL8019 Grey brown	RAL9007 Grey aluminium
Gasket	Silicone rubber gasket			
Fasteners	PCS polymer coated stainless steel			
Ingress protection	IP66			
Impact resistance	IK07			
Corrosion resistance	5CE			

Electrical description














Power supply	Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.
Driver / Ballast	Standard. Optional DALI version available. To be specified at time of ordering.
Surge protection	1/2 kV
Energy efficiency	C-D (Light source)

Additional information







Listings	ETL listed. Suitable for wet locations.
Lifetime	Ta=25°/40° L90B10 > 90000h

Options

Light distribution

		Color temperature	Nominal Watt
	[M] symmetric, medium beam	W [M]	3 W 12 W
	[N] bi-symmetric, narrow beam	W [N]	9 W 18 W
	[N/A60] bi-symmetric, narrow beam up and forward throw down	A60]	13 W 26 W
	[M/M] symmetric, medium beam up and down	M]	6 W
	[N/M] bi-symmetric, narrow beam up and medium beam down	N]	
	[VN/M] symmetric, very narrow beam up and medium beam down		3000K
	[N/N] bi-symmetric, narrow beam up and down		4000K
	[A60] Type IV Very Short		2700K
	[M/A60] symmetric, medium beam up and forward throw down		
	[E/M] symmetric, narrow beam up and medium beam down		
	[E] symmetric, narrow beam		
	[E/E] symmetric, narrow beam up and down		
	[E/A60] symmetric, narrow beam up and forward throw down		

Configurations




Light distribution	Part ID	Light source	Delivered lumens	Rated input power	CRI
 <p>[A60] Type IV Very Short</p>	131-9522	LED-3/6W/2700K	242.6 lm	6 W	80
	131-9944	LED-3/9W/2700K	368.4 lm	9 W	80
	131-0202_us	LED-3/9W/3000K	386.4 lm	9 W	80
	131-0203_us	LED-3/9W/4000K	404.3 lm	9 W	80
	131-9947	LED-3/13W/2700K	467.2 lm	13 W	80
	131-0209_us	LED-3/13W/4000K	516.7 lm	13 W	80
 <p>[E] symmetric, narrow beam</p>	131-9524	LED-3/6W/2700K	611.6 lm	6 W	80
	131-9946	LED-3/9W/2700K	928.7 lm	9 W	80
	131-9949	LED-3/13W/2700K	1177.9 lm	13 W	80
 <p>[E/A60] symmetric, narrow beam up and forward throw down</p>	131-9526	LED-3/12W/2700K	854.5 lm	12 W	80
	131-9951	LED-3/18W/2700K	1297.5 lm	18 W	80
	131-9956	LED-3/26W/2700K	1645.7 lm	26 W	80
 <p>[E/E] symmetric, narrow beam up and down</p>	131-9529	LED-3/12W/2700K	1223.6 lm	12 W	80
 <p>[E/M] symmetric, narrow beam up and medium beam down</p>	131-9528	LED-3/12W/2700K	1157.9 lm	12 W	80
	131-9958	LED-3/26W/2700K	2230 lm	26 W	80
	131-9848	LED-3/26W/4000K	2465.9 lm	26 W	80
 <p>[M] symmetric, medium beam</p>	131-9503_us	LED-2/3W/W [M]	586.5 lm	3 W	80
	131-9507_us	LED-2/3W/W [M]	626.9 lm	3 W	80
	131-9523	LED-3/6W/2700K	546 lm	6 W	80
	131-9945	LED-3/9W/2700K	829.1 lm	9 W	80
	131-0198_us	LED-3/9W/3000K	869.6 lm	9 W	80





WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 05/03/2026

Light distribution	Part ID	Light source	Delivered lumens	Rated input power	CRI	
 <p>[M/A60] symmetric, medium beam up and forward throw down</p>	131-0199_us	LED-3/9W/4000K	910 lm	9 W	80	
	131-9948	LED-3/13W/2700K	1051.6 lm	13 W	80	
	131-0204_us	LED-3/13W/3000K	1112.2 lm	13 W	80	
	131-0205_us	LED-3/13W/4000K	1162.8 lm	13 W	80	
	131-9525	LED-3/12W/2700K	788.8 lm	12 W	80	
	131-9959_us	LED-2x3/12W/A60]	847.2 lm	12 W	80	
	131-9950	LED-3/18W/2700K	1197.8 lm	18 W	80	
	131-9830_us	LED-3/18W/3000K	1256.2 lm	18 W	80	
	131-9835_us	LED-3/18W/4000K	1314.7 lm	18 W	80	
	131-9955	LED-3/26W/2700K	1519.2 lm	26 W	80	
	131-9840_us	LED-3/26W/3000K	1606.8 lm	26 W	80	
	131-9845_us	LED-3/26W/4000K	1679.9 lm	26 W	80	
 <p>[M/M] symmetric, medium beam up and down</p>	131-9527	LED-3/12W/2700K	1092.2 lm	12 W	80	
	131-9513_us	LED-2x3/12W/M]	1173.1 lm	12 W	80	
	131-9519_us	LED-2x3/12W/M]	1254 lm	12 W	80	
	131-9952	LED-3/18W/2700K	1658.5 lm	18 W	80	
	131-9832_us	LED-3/18W/3000K	1739.5 lm	18 W	80	
	131-9837_us	LED-3/18W/4000K	1820.4 lm	18 W	80	
	131-9957	LED-3/26W/2700K	2103.5 lm	26 W	80	
	131-9842_us	LED-3/26W/3000K	2224.9 lm	26 W	80	
	131-9847_us	LED-3/26W/4000K	2326 lm	26 W	80	
	 <p>[N] bi-symmetric, narrow beam</p>	131-9504_us	LED-2/3W/W [N]	656.9 lm	3 W	80
		131-9508_us	LED-2/3W/W [N]	702.2 lm	3 W	80
		131-9502_us	LED-2/3W/W [N]	260.6 lm	3 W	80
131-9506_us		LED-2/3W/W [N]	278.5 lm	3 W	80	
131-0200_us		LED-3/9W/3000K	974 lm	9 W	80	
131-0201_us		LED-3/9W/4000K	1019.3 lm	9 W	80	
131-0206_us		LED-3/13W/3000K	1245.8 lm	13 W	80	
131-0206_us		LED-3/13W/3000K	1245.8 lm	13 W	80	
131-0207_us		LED-3/13W/4000K	1302.5 lm	13 W	80	
131-9512_us		LED-2x3/12W/A60]	981.1 lm	12 W	80	
131-9518_us		LED-2x3/12W/A60]	917.8 lm	12 W	80	
131-9831_us		LED-3/18W/3000K	1360.8 lm	18 W	80	

Light distribution	Part ID	Light source	Delivered lumens	Rated input power	CRI
 <p>[N/A60] bi-symmetric, narrow beam up and forward throw down</p>	131-9836_us	LED-3/18W/4000K	1424.1 lm	18 W	80
	131-9841_us	LED-3/26W/3000K	1740.6 lm	26 W	80
	131-9846_us	LED-3/26W/4000K	1819.7 lm	26 W	80
 <p>[N/M] bi-symmetric, narrow beam up and medium beam down</p>	131-9514_us	LED-2x3/12W/M]	1243.7 lm	12 W	80
	131-9953_us	LED-3/18W/2700K	1758.3 lm	18 W	80
	131-9954_us	LED-3/18W/2700K	1858 lm	18 W	80
	131-9833_us	LED-3/18W/3000K	1844 lm	18 W	80
	131-9838_us	LED-3/18W/4000K	1929.8 lm	18 W	80
	131-9843_us	LED-3/26W/3000K	2358.7 lm	26 W	80
 <p>[N/N] bi-symmetric, narrow beam up and down</p>	131-9515_us	LED-2x3/12W/N]	1314.2 lm	12 W	80
	131-9521_us	LED-2x3/12W/N]	1404.8 lm	12 W	80
	131-9834_us	LED-3/18W/3000K	1948.6 lm	18 W	80
	131-9844_us	LED-3/18W/3000K	1948.6 lm	18 W	80
	131-9839_us	LED-3/18W/4000K	2039.3 lm	18 W	80
	131-9849_us	LED-3/26W/4000K	2605.7 lm	26 W	80
 <p>[VN/M] symmetric, very narrow beam up and medium beam down</p>	131-9520_us	LED-2x3/12W/M]	1329.4 lm	12 W	80