





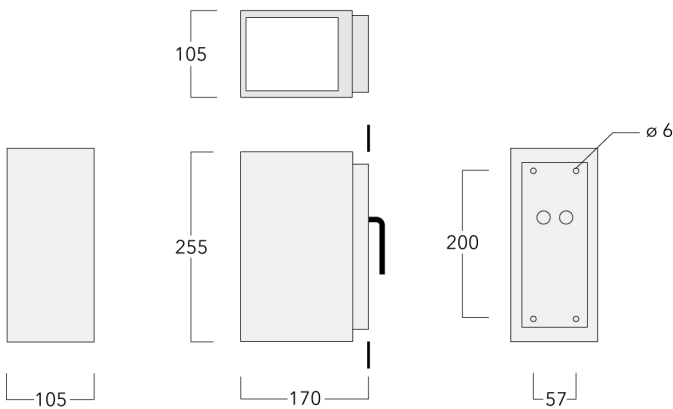
### Description

IP66. Class I. IK07. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. Two cable entries. CAD-optimized optics for superior illumination and glare control. Integral driver. OLC® One LED Concept. Factory-installed LED circuit board. 0-10V Dimming comes standard with luminaire.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX-9004 (Black)

+ XXX-XXXX (Accessory 1)



## Specifications

### Material description

Body	Luminaire body and lens frame constructed in die cast aluminum.			
Lens	Clear tempered glass lens.			
Colors	<b>RAL9004</b>	<b>RAL9016</b>	<b>RAL8019</b>	<b>RAL9007</b>
	Signal black	Traffic white	Grey brown	Grey aluminium
Gasket	Silicone rubber gasket			
Fasteners	PCS polymer coated stainless steel			
Ingress protection	IP66			
Impact resistance	IK07			
Corrosion resistance	5CE			












### Electrical description

Power supply	Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.
Driver / Ballast	Standard. Optional DALI version available. To be specified at time of ordering.
Surge protection	1/2 kV
Energy efficiency	C-D (Light source)






### Additional information

Height x Depth (inches)	10.04 x 6.69
Listings	ETL listed. Suitable for wet locations.
Lifetime	Ta=25°/40° L90B10 > 90000h

**Options**

Light distribution	Color temperature	Nominal Watt
 [M]	 3000K	6 W 12 W
 [E]	 4000K	18 W 13 W
 [A60] Type IV Very Short	 2700K	9 W 26 W
 [E/A60]		
 [M/M]		
 [E/M]		
 [E/E]		
 [M/A60]		

## Configurations




Light distribution	Part ID	Light source	Delivered lumens	Rated input power	CRI
 [A60] Type IV Very Short	131-9522	LED-3/6W/2700K	242.6 lm	6 W	80
	131-9502	LED-3/6W/3000K	260.6 lm	6 W	80
	131-9506	LED-3/6W/4000K	278.5 lm	6 W	80
	131-9944	LED-3/9W/2700K	368.4 lm	9 W	80
	131-9947	LED-3/13W/2700K	467.2 lm	13 W	80
	131-0209	LED-3/13W/4000K	516.7 lm	13 W	80
 [E]	131-9524	LED-3/6W/2700K	611.6 lm	6 W	80
	131-9504	LED-3/6W/3000K	656.9 lm	6 W	80
	131-9508	LED-3/6W/4000K	702.2 lm	6 W	80
	131-9946	LED-3/9W/2700K	928.7 lm	9 W	80
	131-9949	LED-3/13W/2700K	1177.9 lm	13 W	80
	131-0206	LED-3/13W/3000K	1245.8 lm	13 W	80
	131-0206	LED-3/13W/3000K	1245.8 lm	13 W	80
 [E/A60]	131-0207	LED-3/13W/4000K	1302.5 lm	13 W	80
	131-9526	LED-3/12W/2700K	854.5 lm	12 W	80
	131-9518	LED-3/12W/3000K	917.8 lm	12 W	80
	131-9512	LED-3/12W/4000K	981.1 lm	12 W	80
	131-9951	LED-3/18W/2700K	1297.5 lm	18 W	80
	131-9831	LED-3/18W/3000K	1360.8 lm	18 W	80
	131-9836	LED-3/18W/4000K	1424.1 lm	18 W	80
 [E/E]	131-9956	LED-3/26W/2700K	1645.7 lm	26 W	80
	131-9529	LED-3/12W/2700K	1223.6 lm	12 W	80
	131-9515	LED-3/12W/3000K	1314.2 lm	12 W	80
	131-9521	LED-3/12W/4000K	1404.8 lm	12 W	80
	131-9954	LED-3/18W/2700K	1858 lm	18 W	80
 [E/M]	131-9959	LED-3/26W/2700K	2356.5 lm	26 W	80
	131-9528	LED-3/12W/2700K	1157.9 lm	12 W	80
	131-9514	LED-3/12W/3000K	1243.7 lm	12 W	80
	131-9520	LED-3/12W/4000K	1329.4 lm	12 W	80
	131-9953	LED-3/18W/2700K	1758.3 lm	18 W	80
	131-9833	LED-3/18W/3000K	1844 lm	18 W	80
	131-9838	LED-3/18W/4000K	1929.8 lm	18 W	80

## WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 04/10/2026

Light distribution	Part ID	Light source	Delivered lumens	Rated input power	CRI
 [M]	131-9958	LED-3/26W/2700K	2230 lm	26 W	80
	131-9503	LED-3/6W/3000K	586.5 lm	6 W	80
	131-9507	LED-3/6W/4000K	626.9 lm	6 W	80
	131-9948	LED-3/13W/2700K	1051.6 lm	13 W	80
	131-0204	LED-3/13W/3000K	1112.2 lm	13 W	80
 [M/A60]	131-0205	LED-3/13W/4000K	1162.8 lm	13 W	80
	131-9525	LED-3/12W/2700K	788.8 lm	12 W	80
	131-9950	LED-3/18W/2700K	1197.8 lm	18 W	80
	131-9830	LED-3/18W/3000K	1256.2 lm	18 W	80
	131-9835	LED-3/18W/4000K	1314.7 lm	18 W	80
 [M/M]	131-9955	LED-3/26W/2700K	1519.2 lm	26 W	80
	131-9527	LED-3/12W/2700K	1092.2 lm	12 W	80
	131-9513	LED-3/12W/3000K	1173.1 lm	12 W	80
	131-9519	LED-3/12W/4000K	1254 lm	12 W	80
	131-9952	LED-3/18W/2700K	1658.5 lm	18 W	80
	131-9832	LED-3/18W/3000K	1739.5 lm	18 W	80
	131-9837	LED-3/18W/4000K	1820.4 lm	18 W	80
	131-9957	LED-3/26W/2700K	2103.5 lm	26 W	80