

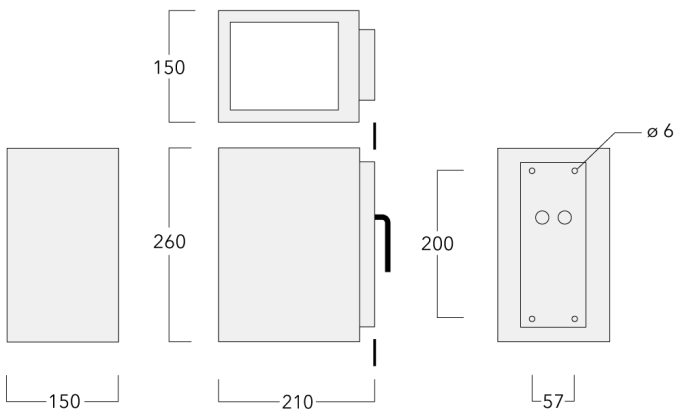
Description

IP66. Class I. IK07. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. Two cable entries. CAD-optimized optics for superior illumination and glare control. Integral driver. OLC® One LED Concept. Factory-installed LED circuit board. 0-10V Dimming comes standard with luminaire.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX-9004 (Black)
+ XXX-XXXX (Accessory 1)

For DarkSky compliant configurations of this product, please find the spec sheet and DarkSky certificate in the library.



Specifications

Material description

Body	Marine-grade die-cast aluminium alloy			
Lens	Safety glass lens			
Colors	RAL9004 Signal black	RAL9016 Traffic white	RAL8019 Grey brown	RAL9007 Grey aluminium
Gasket	Silicone rubber gasket			
Fasteners	PCS Polymer Coated Stainless Steel Hardware			
Ingress protection	IP66			
Impact resistance	IK07			
Corrosion resistance	5CE			

Electrical description















Power supply	Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.
Driver / Ballast	Integral EC electronic converter
Surge protection	1/2 kV
Energy efficiency	C-D (Light source)

Additional information

Listings	ETL listed. Suitable for wet locations.
Lifetime	Ta=25°/40° L90B10 > 90000h

Options

Light distribution

-  [M] symmetric, medium beam
-  [E/E] symmetric, narrow beam up and down
-  [N] bi-symmetric, narrow beam
-  [A60] Type IV Very Short
-  [M/A60] symmetric, medium beam up and forward throw down
-  [VN/A60] symmetric, very narrow beam up and forward throw down
-  [VN/M] symmetric, very narrow beam up and medium beam down
-  [VN/VN] symmetric, very narrow beam up and down
-  [M/M] symmetric, medium beam up and down
-  [N/M] bi-symmetric, narrow beam up and medium beam down
-  [N/N] bi-symmetric, narrow beam up and down
-  [N/A60] bi-symmetric, narrow beam up and forward throw down
-  [E] symmetric, narrow beam
-  [E/A60] symmetric, narrow beam up and forward throw down

Color temperature



3000K



4000K



2700K

Nominal Watt

12 W

24 W

18 W

36 W






26 W






52 W



[A60/A60] asymmetric, forward throw

Configurations

Light distribution	Part ID	Light source	Delivered lumens	Rated input power	CRI
 <p>[A60] Type IV Very Short</p>	131-9332	LED-6/12W/2700K	794 lm	12 W	80
	131-9152_us	LED-6/12W/3000K	852.9 lm	12 W	80
	131-9156_us	LED-6/12W/4000K	911.7 lm	12 W	80
	131-9364	LED-6/18W/2700K	1205.8 lm	18 W	80
	131-0214_us	LED-6/18W/3000K	1264.6 lm	18 W	80
	131-0215_us	LED-6/18W/4000K	1323.4 lm	18 W	80
	131-9367	LED-6/26W/2700K	1529.2 lm	26 W	80
	131-0220_us	LED-6/26W/3000K	1617.5 lm	26 W	80
	131-0221_us	LED-6/26W/4000K	1691 lm	26 W	80
 <p>[A60/A60] asymmetric, forward throw</p>	131-9380	LED-6/24W/2700K	1588.1 lm	24 W	80
	131-9381	LED-6/36W/2700K	2411.6 lm	36 W	80
	131-9382	LED-6/52W/2700K	3058.6 lm	52 W	80
 <p>[E] symmetric, narrow beam</p>	131-9334	LED-6/12W/2700K	1223.2 lm	12 W	80
	131-9366	LED-6/18W/2700K	1857.4 lm	18 W	80
	131-9369	LED-6/26W/2700K	2355.8 lm	26 W	80
 <p>[E/A60] symmetric, narrow beam up and forward throw down</p>	131-9336	LED-6/24W/2700K	2017.7 lm	24 W	80
 <p>[E/E] symmetric, narrow beam up and down</p>	131-9339	LED-6/24W/2700K	2447.1 lm	24 W	80
	131-9333	LED-6/12W/2700K	1092 lm	12 W	80
	131-9153_us	LED-6/12W/3000K	1172.9 lm	12 W	80
	131-9157_us	LED-6/12W/4000K	1253.8 lm	12 W	80







Light distribution	Part ID	Light source	Delivered lumens	Rated input power	CRI
 [M] symmetric, medium beam	131-9365	LED-6/18W/2700K	1658.3 lm	18 W	80
	131-0210_us	LED-6/18W/3000K	1739.1 lm	18 W	80
	131-0211_us	LED-6/18W/4000K	1820 lm	18 W	80
	131-9368	LED-6/26W/2700K	2103.2 lm	26 W	80
	131-0216_us	LED-6/26W/3000K	2224.5 lm	26 W	80
	131-0217_us	LED-6/26W/4000K	2325.6 lm	26 W	80
 [M/A60] symmetric, medium beam up and forward throw down	131-9335	LED-6/24W/2700K	1886.4 lm	24 W	80
	131-9161_us	LED-6/24W/3000K	2026.1 lm	24 W	80
	131-9167_us	LED-6/24W/4000K	2165.8 lm	24 W	80
	131-9370_us	LED-6/36W/2700K	2864.5 lm	36 W	80
	131-9924_us	LED-6/36W/3000K	3004.2 lm	36 W	80
	131-9929_us	LED-6/36W/4000K	3144 lm	36 W	80
	131-9375_us	LED-6/52W/2700K	3633 lm	52 W	80
	131-9934_us	LED-6/52W/3000K	3842.6 lm	52 W	80
	131-9939_us	LED-6/52W/4000K	4017.3 lm	52 W	80
	 [M/M] symmetric, medium beam up and down	131-9337	LED-6/24W/2700K	2184.4 lm	24 W
131-9338		LED-6/24W/2700K	2184.4 lm	24 W	80
131-9372_us		LED-6/36W/2700K	3317.1 lm	36 W	80
131-9926_us		LED-6/36W/3000K	3478.9 lm	36 W	80
131-9931_us		LED-6/36W/4000K	3640.7 lm	36 W	80
131-9377_us		LED-6/52W/2700K	4207.1 lm	52 W	80
131-9936_us		LED-6/52W/3000K	4449.8 lm	52 W	80
131-9941_us		LED-6/52W/4000K	4652 lm	52 W	80
 [N] bi-symmetric, narrow beam		131-9154_us	LED-6/12W/3000K	1313.8 lm	12 W
	131-9158_us	LED-6/12W/4000K	1404.4 lm	12 W	80
	131-0212_us	LED-6/18W/3000K	1948 lm	18 W	80
	131-0213_us	LED-6/18W/4000K	2038.6 lm	18 W	80
	131-0218_us	LED-6/26W/3000K	2491.7 lm	26 W	80
	131-0219_us	LED-6/26W/4000K	2604.9 lm	26 W	80
	131-9371_us	LED-6/36W/2700K	3063.9 lm	36 W	80
	131-9925_us	LED-6/36W/3000K	3213.4 lm	36 W	80
	131-9930_us	LED-6/36W/4000K	3362.8 lm	36 W	80
	131-9376_us	LED-6/52W/2700K	3886 lm	52 W	80

WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 05/03/2026

Light distribution	Part ID	Light source	Delivered lumens	Rated input power	CRI
[N/A60] bi-symmetric, narrow beam up and forward throw down	131-9935_us	LED-6/52W/3000K	4110.1 lm	52 W	80
	131-9940_us	LED-6/52W/4000K	4297 lm	52 W	80
 [N/M] bi-symmetric, narrow beam up and medium beam down	131-9373_us	LED-6/36W/2700K	3516.5 lm	36 W	80
	131-9927_us	LED-6/36W/3000K	3688.1 lm	36 W	80
	131-9932_us	LED-6/36W/4000K	3859.6 lm	36 W	80
	131-9378_us	LED-6/52W/2700K	4460 lm	52 W	80
	131-9937_us	LED-6/52W/3000K	4717.3 lm	52 W	80
 [N/N] bi-symmetric, narrow beam up and down	131-9942_us	LED-6/52W/4000K	4931.7 lm	52 W	80
	131-9374_us	LED-6/36W/2700K	3716 lm	36 W	80
	131-9928_us	LED-6/36W/3000K	3897.2 lm	36 W	80
	131-9933_us	LED-6/36W/4000K	4078.5 lm	36 W	80
 [VN/A60] symmetric, very narrow beam up and forward throw down	131-9379_us	LED-6/52W/2700K	4712.9 lm	52 W	80
	131-9938_us	LED-6/52W/3000K	4984.8 lm	52 W	80
 [VN/M] symmetric, very narrow beam up and medium beam down	131-9162_us	LED-6/24W/3000K	2167.2 lm	24 W	80
	131-9168_us	LED-6/24W/4000K	2316.6 lm	24 W	80
 [VN/VN] symmetric, very narrow beam up and down	131-9164_us	LED-6/24W/3000K	2487.3 lm	24 W	80
	131-9170_us	LED-6/24W/4000K	2658.8 lm	24 W	80
	131-9165_us	LED-6/24W/3000K	2628.4 lm	24 W	80
	131-9171_us	LED-6/24W/4000K	2809.6 lm	24 W	80