






Description

IP66. Class I. IK07. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. Two cable entries. CAD-optimized optics for superior illumination and glare control. Integral driver. OLC® One LED Concept. Factory-installed LED circuit board. 0-10V Dimming comes standard with luminaire.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX-9004 (Black)
+ XXX-XXXX (Accessory 1)

For DarkSky compliant configurations of this product, please find the spec sheet and DarkSky certificate in the library.

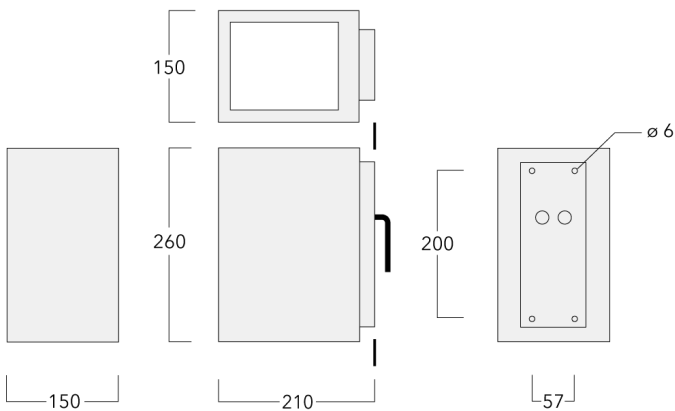

Specifications

Material description

Body	Marine-grade die-cast aluminium alloy			
Lens	Safety glass lens			
Colors	RAL9004 Signal black	RAL9016 Traffic white	RAL8019 Grey brown	RAL9007 Grey aluminium
Gasket	Silicone rubber gasket			
Fasteners	PCS Polymer Coated Stainless Steel Hardware			
Ingress protection	IP66			
Impact resistance	IK07			
Corrosion resistance	5CE			

Electrical description

Power supply	Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.
Driver / Ballast	Integral EC electronic converter
Surge protection	1/2 kV
Energy efficiency	C-D (Light source)

Additional information













Height x Depth (inches)	10.24 x 8.66
Listings	ETL listed. Suitable for wet locations.
Lifetime	Ta=25°/40° L90B10 > 90000h

Options





Light distribution

Color temperature

Nominal Watt

	[M]		3000K	12 W
				24 W
	[E/E]		4000K	18 W
				36 W
	[E]		2700K	26 W
				52 W
	[A60] Type IV Very Short			
	[M/A60]			
	[E/A60]			
	[E/M]			
	[M/M]			
	[A60/A60]			

Configurations





Light distribution	Part ID	Light source	Delivered lumens	Rated input power	CRI
 [A60] Type IV Very Short	131-9332	LED-6/12W/2700K	794 lm	12 W	80
	131-9152	LED-6/12W/3000K	852.9 lm	12 W	80
	131-9156	LED-6/12W/4000K	911.7 lm	12 W	80
	131-9364	LED-6/18W/2700K	1205.8 lm	18 W	80
	131-0214	LED-6/18W/3000K	1264.6 lm	18 W	80
	131-0215	LED-6/18W/4000K	1323.4 lm	18 W	80
	131-9367	LED-6/26W/2700K	1529.2 lm	26 W	80
	131-0220	LED-6/26W/3000K	1617.5 lm	26 W	80
	131-0221	LED-6/26W/4000K	1691 lm	26 W	80
 [A60/A60]	131-9380	LED-6/24W/2700K	1588.1 lm	24 W	80
	131-9381	LED-6/36W/2700K	2411.6 lm	36 W	80
	131-9382	LED-6/52W/2700K	3058.6 lm	52 W	80
 [E]	131-9334	LED-6/12W/2700K	1223.2 lm	12 W	80
	131-9154	LED-6/12W/3000K	1313.8 lm	12 W	80
	131-9158	LED-6/12W/4000K	1404.4 lm	12 W	80
	131-9366	LED-6/18W/2700K	1857.4 lm	18 W	80
	131-0212	LED-6/18W/3000K	1948 lm	18 W	80
	131-0213	LED-6/18W/4000K	2038.6 lm	18 W	80
	131-9369	LED-6/26W/2700K	2355.8 lm	26 W	80
	131-0218	LED-6/26W/3000K	2491.7 lm	26 W	80
	131-0219	LED-6/26W/4000K	2604.9 lm	26 W	80
 [E/A60]	131-9336	LED-6/24W/2700K	2017.7 lm	24 W	80
	131-9162	LED-6/24W/3000K	2167.2 lm	24 W	80
	131-9168	LED-6/24W/4000K	2316.6 lm	24 W	80
	131-9371	LED-6/36W/2700K	3063.9 lm	36 W	80
	131-9925	LED-6/36W/3000K	3213.4 lm	36 W	80
	131-9930	LED-6/36W/4000K	3362.8 lm	36 W	80
	131-9376	LED-6/52W/2700K	3886 lm	52 W	80
	131-9935	LED-6/52W/3000K	4110.1 lm	52 W	80
	131-9940	LED-6/52W/4000K	4297 lm	52 W	80


WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 04/11/2026

Light distribution	Part ID	Light source	Delivered lumens	Rated input power	CRI
 [E/E]	131-9339	LED-6/24W/2700K	2447.1 lm	24 W	80
	131-9165	LED-6/24W/3000K	2628.4 lm	24 W	80
	131-9171	LED-6/24W/4000K	2809.6 lm	24 W	80
	131-9374	LED-6/36W/2700K	3716 lm	36 W	80
	131-9928	LED-6/36W/3000K	3897.2 lm	36 W	80
	131-9933	LED-6/36W/4000K	4078.5 lm	36 W	80
	131-9379	LED-6/52W/2700K	4712.9 lm	52 W	80
	131-9938	LED-6/52W/3000K	4984.8 lm	52 W	80
 [E/M]	131-9164	LED-6/24W/3000K	2487.3 lm	24 W	80
	131-9170	LED-6/24W/4000K	2658.8 lm	24 W	80
	131-9373	LED-6/36W/2700K	3516.5 lm	36 W	80
	131-9927	LED-6/36W/3000K	3688.1 lm	36 W	80
	131-9932	LED-6/36W/4000K	3859.6 lm	36 W	80
	131-9378	LED-6/52W/2700K	4460 lm	52 W	80
	131-9937	LED-6/52W/3000K	4717.3 lm	52 W	80
	131-9942	LED-6/52W/4000K	4931.7 lm	52 W	80
 [M]	131-9333	LED-6/12W/2700K	1092 lm	12 W	80
	131-9153	LED-6/12W/3000K	1172.9 lm	12 W	80
	131-9157	LED-6/12W/4000K	1253.8 lm	12 W	80
	131-9365	LED-6/18W/2700K	1658.3 lm	18 W	80
	131-0210	LED-6/18W/3000K	1739.1 lm	18 W	80
	131-0211	LED-6/18W/4000K	1820 lm	18 W	80
	131-9368	LED-6/26W/2700K	2103.2 lm	26 W	80
	131-0216	LED-6/26W/3000K	2224.5 lm	26 W	80
 [M/A60]	131-9335	LED-6/24W/2700K	1886.4 lm	24 W	80
	131-9161	LED-6/24W/3000K	2026.1 lm	24 W	80
	131-9167	LED-6/24W/4000K	2165.8 lm	24 W	80
	131-9370	LED-6/36W/2700K	2864.5 lm	36 W	80
	131-9924	LED-6/36W/3000K	3004.2 lm	36 W	80
	131-9929	LED-6/36W/4000K	3144 lm	36 W	80
	131-9375	LED-6/52W/2700K	3633 lm	52 W	80
	131-9934	LED-6/52W/3000K	3842.6 lm	52 W	80

Light distribution	Part ID	Light source	Delivered lumens	Rated input power	CRI
 [M/M]	131-9939	LED-6/52W/4000K	4017.3 lm	52 W	80
	131-9337	LED-6/24W/2700K	2184.4 lm	24 W	80
	131-9338	LED-6/24W/2700K	2184.4 lm	24 W	80
	131-9372	LED-6/36W/2700K	3317.1 lm	36 W	80
	131-9926	LED-6/36W/3000K	3478.9 lm	36 W	80
	131-9931	LED-6/36W/4000K	3640.7 lm	36 W	80
	131-9377	LED-6/52W/2700K	4207.1 lm	52 W	80
	131-9936	LED-6/52W/3000K	4449.8 lm	52 W	80
	131-9941	LED-6/52W/4000K	4652 lm	52 W	80