




---

**Description**

Tubular steel, tapered, seamless. Hot dipped galvanised inside and out. Service door with stainless locking screw. Suitable for one cable connecting box. Standard version with planted root and cable entry hole. Chrome-free conversion coating superior powdercoat finish in RAL colour is available up to a maximum length of  $H + E < 9,3$  m.

Please specify RAL colour reference number according to the WE-EF RAL Colour Chart.

Special version with surface mounting flange plate is available on request.

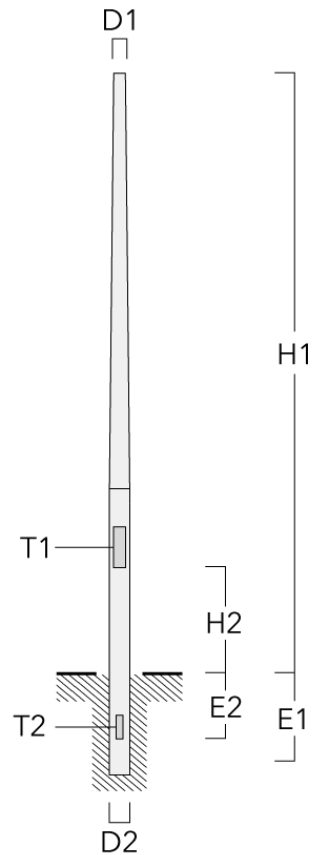

Part ID	D1	D2	E1	E2	H1	H2	T1	T2	Weight (kg)
240-0699	76	108	600	500	3000	600	85×300	50×150	26
240-0484	76	108	700	500	3500	600	85×300	50×150	31
240-0345	76	108	800	500	4000	600	85×300	50×150	35
240-0536	76	114	800	500	4500	600	85×300	50×150	38
240-0659	76	114	800	500	5000	600	85×300	50×150	43
240-0561	76	121	1000	500	6000	600	90×400	50×150	58
240-0627	76	133	1200	500	7000	600	90×400	50×150	79
240-0186	76	133	1300	500	7500	600	90×400	50×150	84
240-0511	76	168	1300	500	8000	600	90×400	50×150	119
240-0200	76	168	1400	500	9000	600	90×400	50×150	135
240-0206	76	168	1500	500	10000	600	90×400	50×150	186