




Description

Tubular steel, one or two formed step. Hot dipped galvanised inside and out. Service door with stainless locking screw. Suitable for one cable connecting box. Standard version with planted root and cable entry hole. Chrome-free conversion coating superior powdercoat finish in RAL colour is available up to a maximum length of $H + E < 9,3$ m.

Please specify RAL colour reference number according to the WE-EF RAL Colour Chart.

Special version with surface mounting flange plate is available on request.

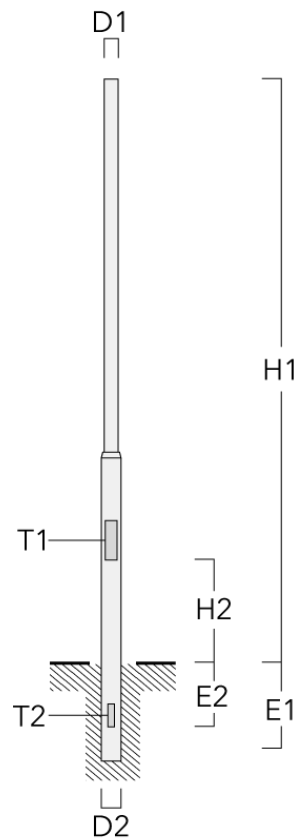

Part ID	D1	D2	E1	E2	H1	H2	T1	T2	Weight (kg)
240-0667	76	108	600	500	3000	600	85×300	50×150	22
240-0381	76	108	700	500	3500	600	85×300	50×150	26
240-0395	76	108	700	500	4000	600	85×300	50×150	30
240-0394	76	108	700	500	4500	600	85×300	50×150	31
240-0696	76	108	800	500	5000	600	85×300	50×150	35
240-0498	76	108	800	500	5500	600	85×300	50×150	40
240-0481	76	108	800	500	6000	600	85×300	50×150	43