




Description

Tubular steel, one or two formed step. Hot dipped galvanised inside and out. Service door with stainless locking screw. Suitable for one cable connecting box. Standard version with planted root and cable entry hole. Chrome-free conversion coating superior powdercoat finish in RAL colour is available up to a maximum length of $H + E < 9,3$ m.

Please specify RAL colour reference number according to the WE-EF RAL Colour Chart.

Special version with surface mounting flange plate is available on request.

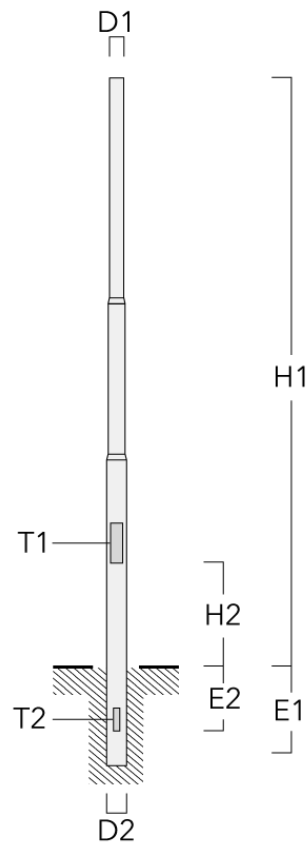

Part ID	D1	D2	E1	E2	H1	H2	T1	T2	Weight (kg)
240-0949	76	108	800	500	6500	600	85×300	50×150	48
240-0731	76	133	1000	500	7000	600	90×400	50×150	65
240-0528	76	133	1200	500	7500	600	90×400	50×150	73
240-0679	76	133	1200	500	8000	600	90×400	50×150	75
240-0104	76	133	1400	500	9000	600	90×400	50×150	88
240-1097	76	133	1500	500	10000	600	90×400	50×150	98