


Description

Tubular steel, one step. Hot dipped galvanised inside and out. Chrome-free conversion coating with superior powdercoat finish in RAL colour. Service door with stainless locking screw. Suitable for one cable connecting box. Standard version with planted root and cable entry hole.

Please specify RAL colour reference number according to the WE-EF RAL Colour Chart.

Special version with surface mounting flange plate is available on request.

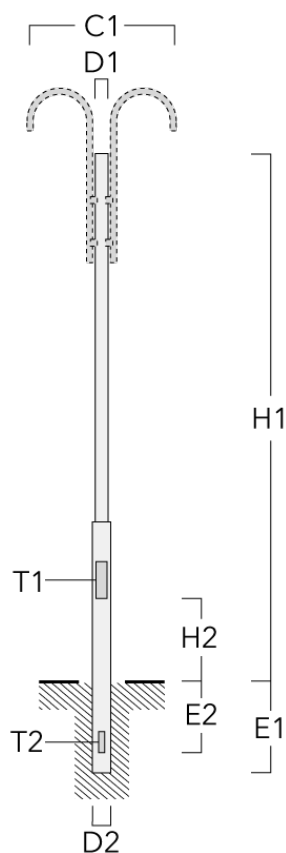

Référence	C1	D1	D2	E1	E2	H1	H2	T1	T2	Poids (kg)
240-0594	1010	76	108	600	500	3000	600	85×300	50×150	23
240-0595	1010	76	108	600	500	3000	600	85×300	50×150	23
240-0596	1010	76	108	700	500	3500	600	85×300	50×150	26
240-0597	1010	76	108	700	500	3500	600	85×300	50×150	26
240-0598	1010	76	108	700	500	4000	600	85×300	50×150	30
240-0599	1010	76	108	700	500	4000	600	85×300	50×150	30
240-0600	1010	76	108	700	500	4500	600	85×300	50×150	33
240-0601	1010	76	108	700	500	4500	600	85×300	50×150	33
240-0602	1010	76	108	800	500	5000	600	85×300	50×150	37
240-0603	1010	76	108	800	500	5000	600	85×300	50×150	37
240-0606	1010	76	108	800	500	6000	600	85×300	50×150	45
240-0607	1010	76	108	800	500	6000	600	85×300	50×150	45