




Description

Tubular steel, one step. Hot dipped galvanised inside and out. Chrome-free conversion coating with superior powdercoat finish in RAL colour. Service door with stainless locking screw. Suitable for one cable connecting box. Standard version with planted root and cable entry hole.

Please specify RAL colour reference number according to the WE-EF RAL Colour Chart.

Special version with surface mounting flange plate is available on request.

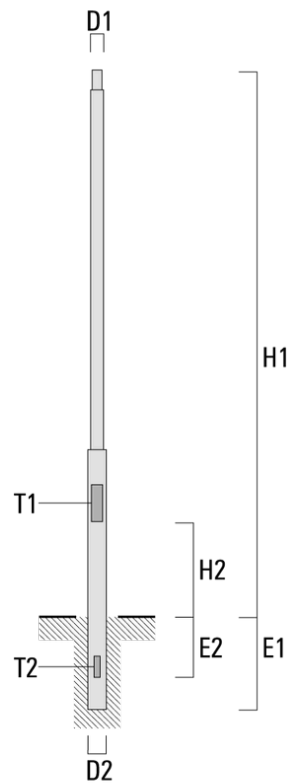

Référence	D1	D2	E1	E2	H1	T1	T2	Poids (kg)
240-1450	89	152	600	500	3000	90×400	50×150	29
240-1451	89	152	700	500	3500	90×400	50×150	32
240-1452	89	152	700	500	4000	90×400	50×150	35
240-1459	89	152	700	500	4500	90×400	50×150	38