




Description

Tubular steel, one step. Hot dipped galvanised inside and out. Chrome-free conversion coating with superior powdercoat finish in RAL colour. Service door with stainless locking screw. Suitable for one cable connecting box. Standard version with planted root and cable entry hole.

Please specify RAL colour reference number according to the WE-EF RAL Colour Chart.

Special version with surface mounting flange plate is available on request.

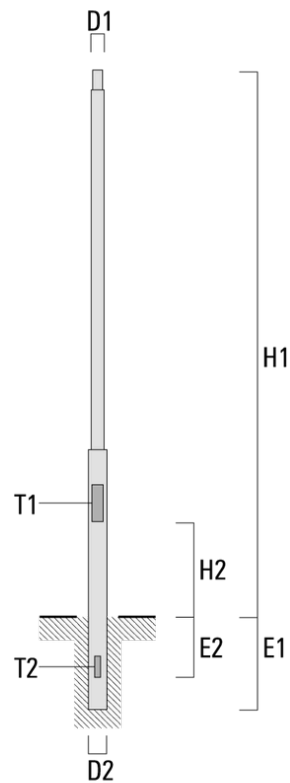

Référence	D1	D2	E1	E2	H1	T1	T2	Poids (kg)
240-1453	102	152	700	500	4500	90×400	50×150	38
240-1454	102	152	800	500	5000	90×400	50×150	46
240-1455	102	152	800	500	5500	90×400	50×150	55
240-1456	102	152	800	500	6000	90×400	50×150	64