




Description

Tubular steel, one step. Hot dipped galvanised inside and out. Chrome-free conversion coating with superior powdercoat finish in RAL colour. Service door with stainless locking screw. Suitable for one cable connecting box. Standard version with planted root and cable entry hole.

Please specify RAL colour reference number according to the WE-EF RAL Colour Chart.

Special version with surface mounting flange plate is available on request.

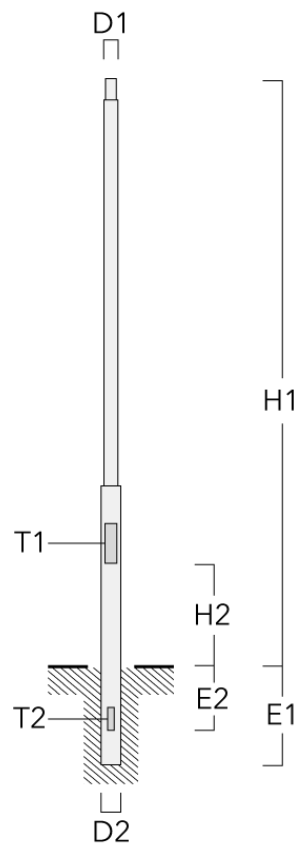

| Part ID | D1 | D2 | E1 | E2 | H1 | H2 | T1 | T2 | Weight (kg) |
|----------|----|-----|-----|-----|------|-----|--------|--------|-------------|
| 240-0584 | 76 | 108 | 600 | 500 | 3000 | 600 | 85×300 | 50×150 | 23 |
| 240-0585 | 76 | 108 | 700 | 500 | 3500 | 600 | 85×300 | 50×150 | 26 |
| 240-0586 | 76 | 108 | 700 | 500 | 4000 | 600 | 85×300 | 50×150 | 30 |
| 240-0587 | 76 | 108 | 700 | 500 | 4500 | 600 | 85×300 | 50×150 | 33 |
| 240-0588 | 76 | 108 | 800 | 500 | 5000 | 600 | 85×300 | 50×150 | 37 |
| 240-0589 | 76 | 108 | 800 | 500 | 5500 | 600 | 85×300 | 50×150 | 41 |
| 240-0590 | 76 | 108 | 800 | 500 | 6000 | 600 | 85×300 | 50×150 | 45 |