




Description

Tubular steel, stepped, hot dipped galvanised. 5CE+Primer superior corrosion protection, including PCS hardware. Powdercoat finish in black RAL 9004, grey aluminium RAL 9007, anthracite grey RAL 7016 or white RAL 9016. Surface mounting flange plate with die-cast aluminium cover to conceal mounting hardware. Service door.

Spigot dimensions may vary, dependent on type of luminaire used, and must be specified at time of ordering.

Planted root is available depending on site-specific requirements; to be ordered separately.

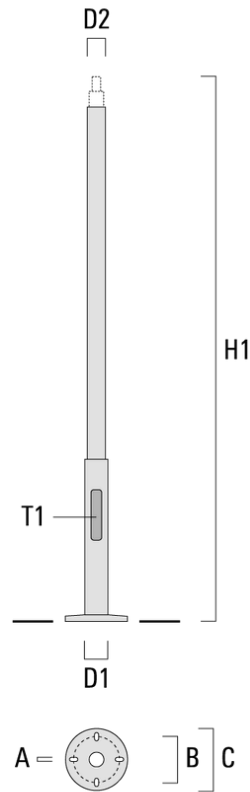

Part ID	D1	D2	B	C	H1	A	T1	Weight (kg)
270-9290	140	76	244	365	2500	20	90×400	54
270-9291	140	76	244	365	3000	20	90×400	56.5
270-9292	140	76	244	365	3500	20	90×400	62
270-9293	140	76	244	365	4000	20	90×400	64.5
270-9294	140	76	244	365	4500	20	90×400	67
270-9295	140	76	244	365	5000	20	90×400	69.5
270-9296	140	76	244	365	5500	20	90×400	72
270-9325	140	114	244	365	2500	20	90×400	54
270-9326	140	114	244	365	3000	20	90×400	56.5
270-9327	140	114	244	365	3500	20	90×400	62
270-9328	140	114	244	365	4000	20	90×400	64.5
270-9329	140	114	244	365	4500	20	90×400	67
270-9330	140	114	244	365	5000	20	90×400	69.5
270-9331	140	114	244	365	5500	20	90×400	72
270-9320	165	114	300	425	6000	24	90×400	136
270-9321	165	114	300	425	6500	24	90×400	140

Part ID	D1	D2	B	C	H1	A	T1	Weight (kg)
270-9322	165	114	300	425	7000	24	90×400	144
270-9323	165	114	300	425	7500	24	90×400	148
270-9324	165	114	300	425	8000	24	90×400	152
270-9299	165	140	300	425	6000	24	90×400	143.5
270-9300	165	140	300	425	6500	24	90×400	151
270-9301	165	140	300	425	7000	24	90×400	169
270-9302	165	140	300	425	7500	24	90×400	176.5
270-9303	165	140	300	425	8000	24	90×400	184
