




---

**Description**

Tubular aluminium, constant section. 5CE+Primer superior corrosion protection, including PCS hardware. Powdercoat finish in black RAL 9004, grey aluminium RAL 9007, anthracite grey RAL 7016 or white RAL 9016. Surface mounting die-cast aluminium base with covers to conceal mounting hardware. Service door. <br><br>

Spigot dimensions may vary, dependent on type of luminaire used, and must be specified at time of ordering.  
<br><br>

Planted root is available depending on site-specific requirements; to be ordered separately.

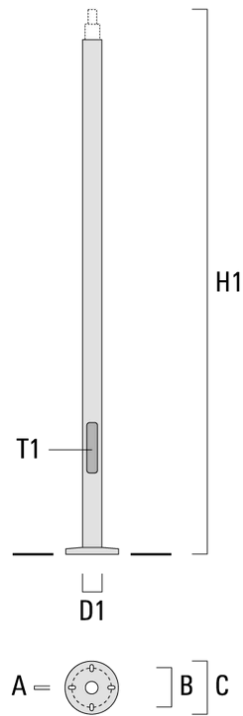

Part ID	D1	B	C	H1	A	T1	Weight (kg)
270-9041	100	177	295	2000	18.5	75×200	11.5
270-9042	100	177	295	2500	18.5	75×200	12.5
270-9044	100	177	295	3000	18.5	75×200	13.5
270-9040	140	244	365	2500	18.5	90×400	22.5
270-9043	140	244	365	3000	18.5	90×400	25
270-9045	140	244	365	3500	18.5	90×400	27.5