



---

**Description**

Straight round aluminum, anchored. Chromated pre-treatment with superior powdercoat finish in black RAL9004, grey metallic RAL9007, white RAL9016 or dark bronze RAL8019. Service door included, varies by product size.

The shaft is extruded from all new 6063 alloy aluminum tubing and heat treated to produce a T6 temper. Cast from A356 alloy aluminum, the anchor base is heat treated to produce a T6 condition and inserted into the anchor base casting. The two pieces are joined by a continuous circumferential weld at the outside top and inside bottom of the anchor base. The anchor bolts and nuts recess in the base casting, sitting flush, and are covered by four (4) tamper-resistant aluminum nut cover discs. Anchor bolts provided with pole.

Refer to Individual Spec sheets for allowable wind loading (Square Feet) - attached at the bottom.

Specify Product Code


-

Specify Pole Top or Tenon: 3"x3" Tenon (-T3x3), 3"x4" Tenon (-T3x4), 3"x4" Tenon (-T3x5), or Pole Cap (-CAP)

-

Specify Finish Color: Black (-9004), Grey Metallic (-9007), White (-9016), or Dark Bronze (-8019); (consult WE-EF color chart for others)

SAMPLE: 695-1140-T3x5-9004

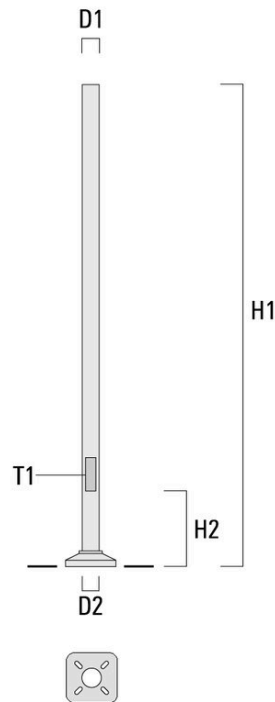

Part ID	D1	D2	H1	H2	Wall Thickness	Weight (lb)
693-1220	101.6	101.6	2438.4	599.95	3.3	8.62
693-1221	101.6	101.6	3048	599.95	3.3	9.98
693-1222	127	127	3048	599.95	3.3	12.25
693-1223	101.6	101.6	3657.6	599.95	3.3	11.79
693-1224	127	127	3657.6	599.95	4.06	17.24
693-1225	127	127	4267.2	599.95	4.06	19.96
693-1230	127	127	4876.8	599.95	4.83	26.31
693-1231	152.4	152.4	4876.8	599.95	4.06	26.76
693-1232	127	127	5486.4	599.95	4.83	29.48
693-1233	152.4	152.4	5486.4	599.95	4.83	35.38
693-1234	152.4	152.4	6096	599.95	4.06	33.11
693-1235	152.4	152.4	6096	599.95	4.83	39.01
693-0420	152.4	152.4	2438.4	599.95	4.06	0
693-0421	152.4	152.4	3048	599.95	4.06	0
693-0424	152.4	152.4	3657.6	599.95	4.06	0

Part ID	D1	D2	H1	H2	Wall Thickness	Weight (lb)
693-0422	152.4	152.4	4267.2	599.95	4.06	0
693-0423	152.4	152.4	4876.8	599.95	4.06	26.76
693-0425	152.4	152.4	5486.4	599.95	4.83	35.38
693-0426	152.4	152.4	6096	599.95	4.83	39.01
693-0427	152.4	152.4	7620	599.95	4.83	48.08