




Description

Impregnated hardwood top section with anodised aluminium core structure. Galvanised steel base section. 5CE+Primer superior corrosion protection, including PCS hardware. Powdercoat finish in black RAL 9004, grey aluminium RAL 9007, anthracite grey RAL 7016 or white RAL 9016. Surface mounting flange plate with die-cast aluminium cover to conceal mounting hardware. Service door.

Spigot dimensions may vary, dependent on type of luminaire used, and must be specified at time of ordering.

Planted root is available depending on site-specific requirements; to be ordered separately.

Natural wood is susceptible to colour and texture variations over time. It is recommended to use a suitable wood stain once a year for protection.

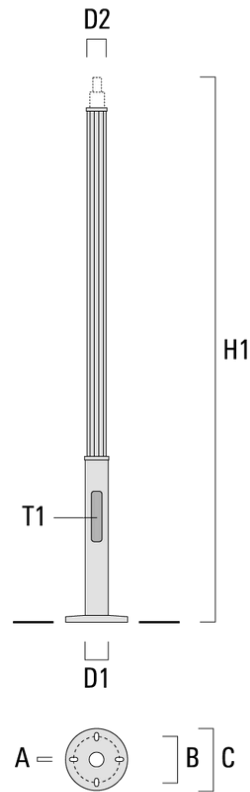

Part ID	D1	D2	B	C	H1	A	T1	Weight (kg)
270-9309	165	140	300	425	6000	24	90×400	129.5
270-9310	165	140	300	425	6500	24	90×400	135.5
270-9311	165	140	300	425	7000	24	90×400	157
270-9312	165	140	300	425	7500	24	90×400	163
270-9313	165	140	300	425	8000	24	90×400	168.5