




---

**Beschreibung**

Tubular steel, tapered. Hot dipped galvanised inside and out. Standard version with planted root and cable entry hole. One, two or three service doors, depending on application. Poles are supplied in two sections for nominal heights of 16 m or above. Optional climbing rungs from 3 m above ground are available at additional charge.

The maximum windage area is dependant on location. The maximum permissible number of floodlights require individual calculations.

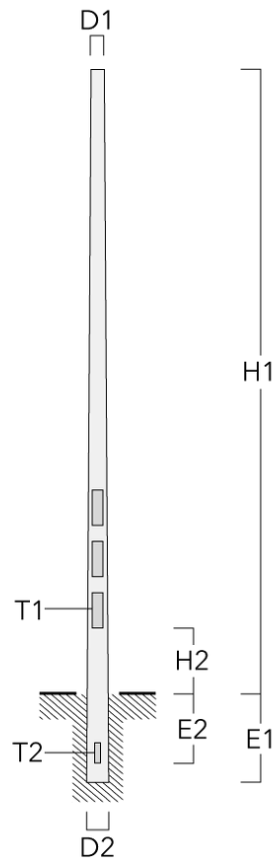

Artikelnummer	D1	D2	E1	E2	H1	H2	T1	T2	Gewicht (kg)
260-0001	108	223	1500	500	10000	500	90×400	50×150	189
260-0003	108	223	1500	500	10000	500	90×400	50×150	189
260-0055	76	211	1500	500	12000	500	90×400	50×150	198
260-0056	89	223	1500	500	12000	500	90×400	50×150	221
260-0004	108	243	1500	500	12000	500	90×400	50×150	247
260-0008	108	243	1500	500	12000	500	90×400	50×150	247
260-0146	108	283	1500	500	16000	500	140×600	50×150	373
260-0147	108	283	1500	500	16000	500	140×600	50×150	373
260-0018	108	303	1500	500	18000	500	140×600	50×150	425
260-0019	108	303	1500	500	18000	500	140×600	50×150	425
260-0021	108	303	1500	500	18000	500	140×600	50×150	462