


VFL530-SE LED Upgrade Kit

Pole mounted

we-ef

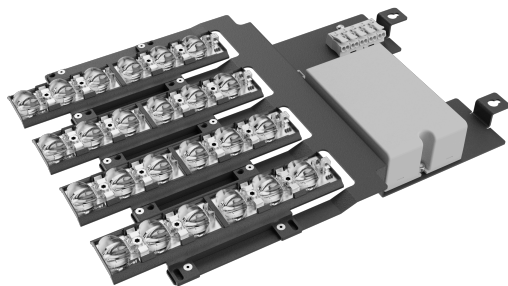

Description

LED upgrade kit to repair or upgrade installed VFL530-SE LED luminaires (from 2014) with [S60] [S65] [S70] [S65] light distribution.

Upgrade kit uses the latest technology for improved energy performance. Connectivity and controls dependent on previous luminaire settings; DALI and 0-10V only possible if luminaire installed with 5-wire cable. One LED retrofit kit possible per luminaire. Upgrade Kit comes complete with driver, LED board, optics and cables. Quick installation possible with few tools. Installation only possible with 6 LED board and only for forward orientation. No rotation of lenses possible. Not available for existing hybrid installations. A backlight shield cannot be used.

Please specify wattage, colour temperature and light distribution when ordering!

For photometric data see current VFL530-SE LED luminaires.

Fagerhult Lighting Ltd

33-34 Dolben Street, SE1 0UQ London, United Kingdom

<https://we-ef.com/uk>


Subject to technical changes and errors. - Generated on 23/11/2024

VFL530-SE LED Upgrade Kit

Pole mounted

Specifications

Material description

Body	Chassis made of coated steel
Lens	NA
Colours	 RAL9006 White aluminium
Gasket	NA
Fasteners	Polycarbonate holder
Corrosion resistance	NA

Electrical description

Power supply	220-240V / 50-60 Hz
Driver / Ballast	Integral EC electronic converter. DALI
Power factor	> 9.0

Additional information

Lifetime	Ta=25° L90B10 > 90000h
Energy efficiency class	C-D (Light source)

VFL530-SE LED Upgrade Kit

Pole mounted

we-ef

Options

Light distribution

[S60] [S65] [S70] or [R65]

Colour temperature

2700-4000K

Nominal Watt

0 W

Fagerhult Lighting Ltd

33-34 Dolben Street, SE1 0UQ London, United Kingdom

<https://we-ef.com/uk>

Subject to technical changes and errors. - Generated on 23/11/2024

VFL530-SE LED Upgrade Kit

Pole mounted

Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (kg)
[S60][S65][S70] or [R65]	108-3129	Chassis Kit LED-12/24W / 700mA			70/80	1.20
	108-3305	Chassis Kit LED-12/12W / 350mA			70/80	1.20
	108-3307	Chassis Kit LED-24/24W / 350mA			70/80	1.20
	108-3308	Chassis Kit LED-24/48W / 700mA			70/80	1.20
	108-3309	Chassis Kit LED-24/72W / 1050mA			70/80	1.20