



WE-EF LEUCHTEN Installation and Maintenance Instructions

Wall Luminaires Surface Mounted
SLS410 LED
SLS420 LED



Do not open during installation

This product is factory-sealed. Refer to the instructions contained in this document for details.



Surge Protection


This product features built-in surge protection circuitry in compliance with applicable standards.

For comprehensive protection of a luminaire installation against lightning and electrical surges, it is essential to cover mains supply and data input lines at the distribution board level, by using respective primary (Type 1) and secondary (Type 2) surge arrestors in compliance with EN61643-11/ IEC61643-1.

Warning

Ensure that all required surge protection measures are in place and activated prior to luminaire installation. Also, disconnect luminaires before operating high-power devices such as, for example, electrical arc welders.

Wall Luminaires Surface Mounted

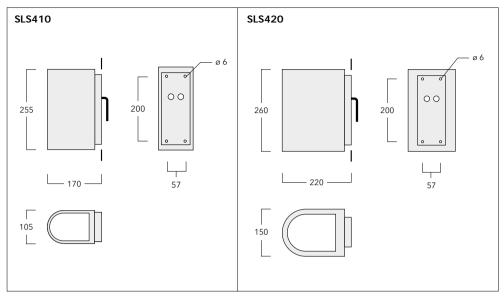

IP66, IK07, Class I, ta $\leq 40^{\circ}$ C

Light Source

LED

Maintenance

Apart from cleaning the product's exterior surfaces, no special maintenance work is required. Do not use high-pressure cleaners.

In case of component failure due to abnormal circumstances or at end of life, replacement must be carried out by a suitably qualified and trained professional.

Warning: Do not open luminaire while mains supply is switched on.

Installation

The product must be installed and maintained by a suitably qualified professional in compliance with latest building/construction and/or electrical regulations and relevant legislation.

Warning: Switch off mains electrical supply prior to installing and connecting the luminaire.


Notice: If the luminaire is modified by anybody other than the original manufacturer, then the warranty will no longer be valid and shall become the full responsibility of the modifying person/organisation. Claims based on defects attributable to improper installation and/or application, and the consequences thereof, are excluded.


Attention: The luminaire is factory-sealed and does not need to be opened during installation.


national health and safety regulations.

Installation Procedure

- 1) Switch off the mains electrical supply.
- 2) Remove wall flange A from cover B by loosening screws C
- 3) Check that rating shown on luminaire label conforms with mains electrical supply.
- 4) Determine positions for four fixing screws **D**. Drill relevant holes E and insert wall plugs F. Warning: Ensure not to damage any electric cable, water pipe or other devices while drilling holes.
- 5) Feed mains supply cable G (and the second cable H for through wiring, if required) through cable gland I at the side of the wall flange, while setting and fixing wall flange in position. The cable gland I is suitable for cable diameters 7 to 12 mm.
- 6) Ensure the point arrow mark **R** on the wall flange aims upwards and that the luminaire is properly oriented. Fix the wall flange by inserting and tightening screws D.
- The installation on site must comply with local and/or 7) Connect mains supply leads to respective terminals in terminal block J:
 - a) ON/OFF (L = Phase, N = Neutral, \oplus = Farthing) b) 1-10 V/DALI (L = Phase, N = Neutral, Earthing, DA/DA = DALI control line.
 - D-/D+ = 1-10 V control line).
 - 8) Tighten cable gland(s) I.
 - 9) Reposition cover **B** on wall flange **A** and secure in position by evenly tightening the screws C.

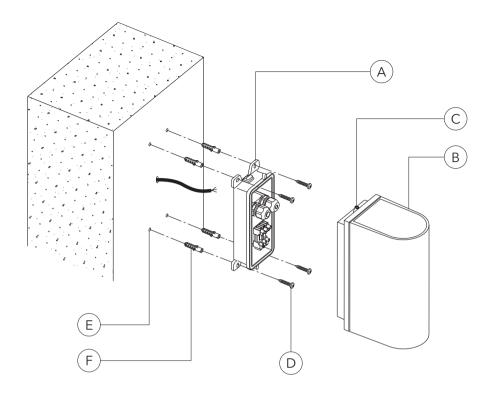

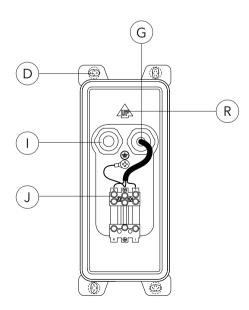

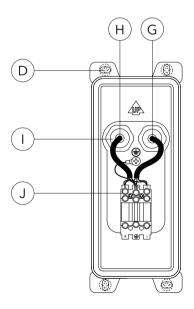

Individual connection

Through wiring



WE-EF LEUCHTEN

Germany Tel +49 5194 909 0 Fax +49 5194 909 299 info.germany@we-ef.com

WE-EF LUMIERE

France Tel +33 4 74 99 14 44 Fax +33 4 74 99 14 40 info.france@we-ef.com

WE-EF SWITZERLAND

Switzerland Tel +41 22 752 49 94 Fax +41 22 752 49 74 info.switzerland@we-ef.com

WE-EF LIGHTING

Thailand Tel +66 2 738 9610 Fax +66 2 175 2174 info.asiapacific@we-ef.com

WE-EF LIGHTING

Australia Tel +61 3 8587 0444 Fax +61 3 8587 0499 info.australia@we-ef.com

WE-EF LIGHTING

United States of America Tel +1 724 742 0030 Fax +1 724 742 0035 info.usa@we-ef.com

TO9051W0823 © WE-EF 2023

Technical specifications are subject to change.