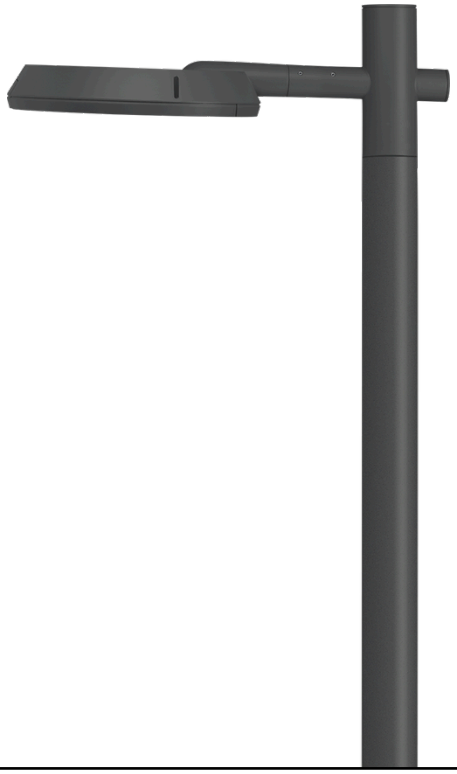

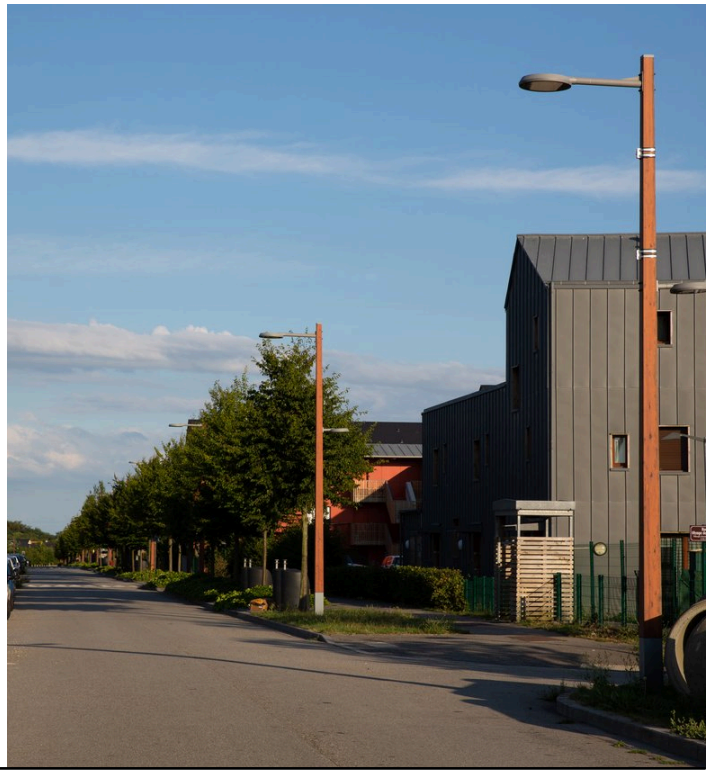

Pole-Mounted Luminaires

RFL530-SE LED Upgrade Kit

LED upgrade kit to repair or upgrade installed RFL530-SE LED luminaires (from 2013) with [S60] [S65] [S70] [S65] light distribution.
Upgrade kit uses the latest technology for improved energy performance. Connectivity and controls dependent on previous luminaire settings; DALI and 0-10V only possible if luminaire installed with 5-wire cable. One LED retrofit kit possible per luminaire.
Upgrade Kit comes complete with driver, LED board, optics and cables. Quick installation possible with few tools. Installation only possible with 6 LED board and only for forward orientation. No rotation of lenses possible. Not available for existing hybrid installations. A backlight shield cannot be used.

Please specify wattage, colour temperature and light distribution when ordering!

For photometric data see current RFL530-SE LED luminaires

Upgrade Kit
Variant

Lighting

Light distribution Colour temperature Wattage

Physical description

Height	100 mm
Diameter	460 mm
Weight	1.2 kg
Body	Chassis made of coated steel
Lens	NA
Colours	**RAL9006** White aluminium
Gasket	NA
Fasteners	Polycarbonate holder
Mounting	See installation instructions for details
Corrosion resistance	5CE +Primer

Electrical description

Power supply	220-240V / 50-60 Hz
Driver / Ballast	Integral EC electronic converter. DALI
Energy efficiency	C-D (Light source)

Additional information

Lifetime	Ta=40° L90B10 > 90000h

Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI

Pole-Mounted Luminaires

RFL530-SE LED Upgrade Kit

we-ef

A Fagerhult Group Company

WE-EF LIGHTING Pty Ltd
47 Tarnard Drive, 3195 Braeside, Victoria
Phone: +61 3 8587 0444
Fax: +61 3 8587 0499
info.australia@we-ef.com
https://we-ef.com/aus

Information and specifications subject to change without notice.