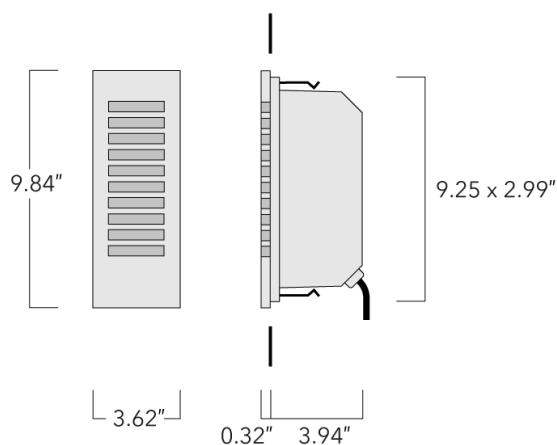


Recessed Wall Luminaires**Description**

Vertically oriented, louvred steplight.

ADA (American Disabilities Act) Compliant.

IP55. Class I. IK10. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Polycarbonate main lens. Two cable entries. Integral driver. Factory-installed LED circuit board. 0-10V Dimming standard.

A pre-installation blockout is available and recommended for mounting in concrete walls; to be ordered separately.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX-9004 (Black)
+ XXX-XXXX (Accessory 1)

Recessed Wall Luminaires**Specifications****Material description**

| | |
|----------------------|--|
| Body | Luminaire body and lens frame constructed in die cast aluminum |
| Lens | Opal polycarbonate lens. |
| Colors |  RAL9004 Black  RAL9007 Grey Metallic  RAL9016 White  RAL8019 Dark Bronze |
| Gasket | Silicone rubber gasket |
| Fasteners | PCS polymer coated stainless steel |
| Ingress protection | IP55 |
| Impact resistance | IK10 |
| Corrosion resistance | 5CE |

Electrical description

| | |
|------------------|---|
| Power supply | 120-277V / 50-60 Hz 0-10 V dimmable driver. |
| Driver / Ballast | Integral EC electronic converter |

Additional information

| | |
|----------|---|
| Lifetime | Ta=25°/40° L80B10 > 54000h |
| Listings | ETL listed. Suitable for wet locations. |

Recessed Wall Luminaires**Options****Light distribution****Color temperature****Nominal Watt**

diffused distribution



3000 K

1 W




4000 K



2700 K

Recessed Wall Luminaires**Configurations**

| Light distribution | Part ID | Light source | Delivered lumens | Rated input power | CRI | Weight (lb) |
|--|----------|----------------------------|------------------|-------------------|-----|-------------|
| diffused distribution  + | 133-0360 | LED-6/6W / 350 mA - 3000 K | 37.5 | 7.5 W | 80 | 2.60 |
| | 133-0361 | LED-6/6W / 350 mA - 4000 K | 41.1 | 7.5 W | 80 | 2.60 |
| | 133-0442 | LED-6/6W / 350 mA - 2700 K | 35.1 | 7.5 W | 80 | 2.60 |

Recessed Wall Luminaires**Mounting Accessories****Installation breakout**

| Description | Part ID | A | B | C1 |
|-------------------------------|----------|--------|-------|-------|
| Installation breakout BST25-I | 133-0076 | 10.51" | 5.19" | 5.12" |

