

OLV340 LED

Wall luminaires surface mounted

we-ef



WE-EF LEUCHTEN GmbH


Töpinger Straße 16, 29646 Bispingen, Germany - Phone: +49 5194 909-0
info@we-ef.com - <https://we-ef.com>

Subject to technical changes and errors. - Generated on 23/11/2024

OLV340 LED

Wall luminaires surface mounted

we-ef

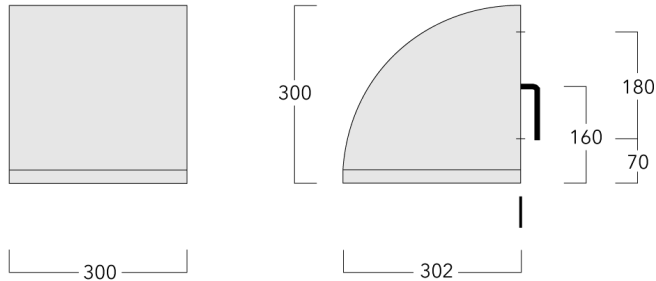

Description

IP65, Class I. Class II on request. IK07. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. Two cable entries. Integral EC electronic converter. CAD-optimised optics for superior illumination and glare control. OLC® One LED Concept. Factory installed LED circuit board. 1-10V or DALI interface on request. Optional 2200 K version available. To be specified at time of ordering.






Can be mounted up or down.

WE-EF LEUCHTEN GmbH

Töpinger Straße 16, 29646 Bispingen, Germany - Phone: +49 5194 909-0
info@we-ef.com - <https://we-ef.com>

Subject to technical changes and errors. - Generated on 23/11/2024

Wall luminaires surface mounted**Specifications****Material description**

Body	Marine-grade die-cast aluminium alloy
Lens	Safety glass lens
Colours	 RAL9004 Signal black
	 RAL9006 White aluminium
	 RAL9007 Grey aluminium
	 RAL7016 Anthracite grey
	 RAL9016 Traffic white
Gasket	Silicone CCG® Controlled Compression Gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware
Ingress protection	IP65
Impact resistance	IK07
Corrosion resistance	5CE

Electrical description

Power supply	220-240V / 50-60 Hz
Driver / Ballast	Standard. Optional DALI version available. To be specified at time of ordering.
Surge protection	6/6 kV (optional SP10)

Additional information

Lifetime	Ta=25° L90B10 > 90000h
Energy efficiency class	C-D (Light source)

OLV340 LED

Wall luminaires surface mounted

we-ef

Options

Light distribution



symmetric, medium beam [M]



symmetric, very narrow beam, sharp cut-off [EES]

Colour temperature



3000 K



4000 K



2700 K

Nominal Watt

29 W

42 W



0 W

WE-EF LEUCHTEN GmbH

Töpinger Straße 16, 29646 Bispingen, Germany - Phone: +49 5194 909-0
info@we-ef.com - <https://we-ef.com>

Subject to technical changes and errors. - Generated on 23/11/2024

Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (kg)
symmetric, medium beam [M] 	132-0542	LED-24/24W / 350 mA - 3000 K	3232.1	26.5 W	80	11.40
	132-0543	LED-24/24W / 350 mA - 4000 K	3544.9	26.5 W	80	11.40
	132-0552	LED-24/36W / 500 mA - 3000 K	4483.2	39 W	80	11.40
	132-0553	LED-24/36W / 500 mA - 4000 K	4796	39 W	80	11.40
	132-0643	LED-24/24W / 350 mA - 2700 K	3023.6	26.5 W	80	11.40
	132-0644	LED-24/36W / 500 mA - 2700K	4170.5	39 W	80	11.40
symmetric, very narrow beam, sharp cut-off [EES] 	132-0544	LED-24/24W / 350 mA - 3000 K	3443.5	26.5 W	80	11.40
	132-0545	LED-24/24W / 350 mA - 4000 K	3776.7	26.5 W	80	11.40
	132-0554	LED-24/36W / 500 mA - 3000 K	4776.5	39 W	80	11.40
	132-0555	LED-24/36W / 500 mA - 4000 K	5109.7	39 W	80	11.40
	132-0645	LED-24/24W / 350 mA - 2700 K	3221.3	26.5 W	80	11.40
	132-0646	LED-24/36W / 500 mA - 2700K	4443.2	39 W	80	11.40

Control**DALI interface**

Description	Part ID	Additional information	C
DALI interface	430-0013	DALI variant. The luminaire is equipped with a DT6 Dali driver (Dali 2.0).	90

Dali 2.0

- Application controllers and Input devices defined
- Single-masters and multi-masters allowed
- Event priorities defined
- Separate addressing & grouping from control gear

Note: Mixing Dali 1 and Dali 2.0 drivers can cause problems because the addressing and the command scope has changed!