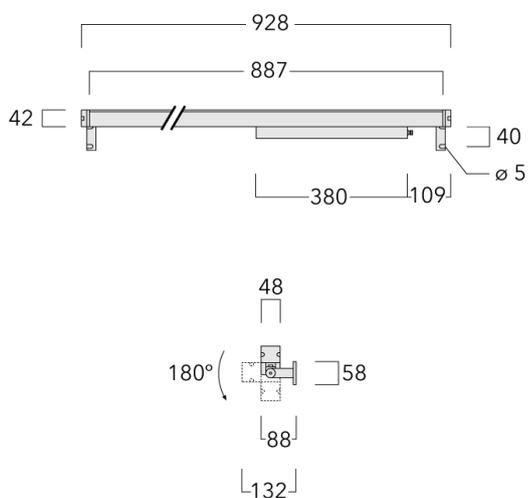


Wall luminaires surface mounted



Description

IP67, Class I. IK09. Marine-grade, all aluminium construction. 5CE superior corrosion protection + primer including PCS hardware. PMMA cover. Silicone rubber gasket. Linear PMMA LED lens. 1.2 m connecting cable, UV stabilized, PVC free. Luminaire is factory sealed and does not need to be opened during installation and can be tilted up to 180°. Integral LED driver with DALI interface.

Separate LED driver on request.

Wall luminaires surface mounted

Specifications**Material description**

Body	Marine-grade, all-aluminium construction
Lens	PMMA
Colours	 RAL9004 Signal black  RAL9006 White aluminium  RAL9007 Grey aluminium
Gasket	Silicone rubber gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware (unpainted)
Ingress protection	IP67
Impact resistance	IK09
Corrosion resistance	5CE+Primer

Electrical description

Power supply	230V / 50 Hz
Driver / Ballast	Integral LED driver with DALI Interface

Additional information

Lifetime	Ta=40° L90B10 > 90000h
Warranty	The product is supplied with 10-year warranty. Please refer to the LED Warranty Statement located on www.we-ef.com for further details.

Wall luminaires surface mounted

Options

Light distribution



symmetric linear, medium beam [LM]



symmetric linear, narrow beam [LE]



symmetric linear, very narrow beam [LEE]



symmetric linear, wide beam [LB]



symmetric linear, wide beam [LB/IW - Honeycomb]



symmetric linear, medium beam [LM/IW - Honeycomb]



symmetric linear, narrow beam [LE/IW - Honeycomb]

Colour temperature



3000 K



4000 K



2700 K








Nominal Watt

27 W

0 W

Wall luminaires surface mounted

Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (kg)
symmetric linear, medium beam [LM/ IW - Honeycomb] 	187-0498	LED-48/30W / 225 mA - 3000 K	1603.2	33.5 W	80	3.25
	187-0499	LED-48/30W / 225 mA - 4000 K	1603.2	33.5 W	80	3.25
	187-0587	LED-48/30W / 225 mA - 2700 K	1603.2	33.5 W	80	3.25
symmetric linear, medium beam [LM] 	187-0003	LED-48/30W / 225 mA - 3000 K	3210.6	33.5 W	80	3.25
	187-0039	LED-48/30W / 225 mA - 4000 K	3210.6	33.5 W	80	3.25
	187-0538	LED-48/30W / 225 mA - 2700 K	3210.6	33.5 W	80	3.25
symmetric linear, narrow beam [LE/ IW - Honeycomb] 	187-0500	LED-48/30W / 225 mA - 3000 K	1670.5	33.5 W	80	3.25
	187-0501	LED-48/30W / 225 mA - 4000 K	1670.5	33.5 W	80	3.25
	187-0588	LED-48/30W / 225 mA - 2700 K	1670.5	33.5 W	80	3.25
symmetric linear, narrow beam [LE] 	187-0007	LED-48/30W / 225 mA - 3000 K	3151.9	33.5 W	80	3.25
	187-0040	LED-48/30W / 225 mA - 4000 K	3151.9	33.5 W	80	3.25
	187-0539	LED-48/30W / 225 mA - 2700 K	3151.9	33.5 W	80	3.25
symmetric linear, very narrow beam [LEE] 	187-0011	LED-48/30W / 225 mA - 3000 K	3608.9	33.5 W	80	3.25
	187-0041	LED-48/30W / 225 mA - 4000 K	3608.9	33.5 W	80	3.25
	187-0540	LED-48/30W / 225 mA - 2700 K	3608.9	33.5 W	80	3.25
symmetric linear, wide beam [LB/IW - Honeycomb] 	187-0496	LED-48/30W / 225 mA - 3000 K	1277.3	33.5 W	80	3.25
	187-0497	LED-48/30W / 225 mA - 4000 K	1277.3	33.5 W	80	3.25
	187-0586	LED-48/30W / 225 mA - 2700 K	1277.3	33.5 W	80	3.25
symmetric linear, wide beam [LB] 	187-0025	LED-48/30W / 225 mA - 3000 K	2873.6	33.5 W	80	3.25
	187-0042	LED-48/30W / 225 mA - 4000 K	2873.6	33.5 W	80	3.25
	187-0537	LED-48/30W / 225 mA - 2700 K	2873.6	33.5 W	80	3.25

Wall luminaires surface mounted

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (kg)
