



Description

Low-glare, diffused steplight.


ADA (American Disabilities Act) Compliant.

IP66. Class I. IK07. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Powdercoat Finish. Silicone CCG® Controlled Compression Gasket. Opal polycarbonate main lens. Two cable entries. 0-10V Dimming comes standard with luminaire.

Pre-installation blackout is recommended for mounting in concrete, available on request.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX-9004 (Black)  
+ XXX-XXXX (Accessory 1)

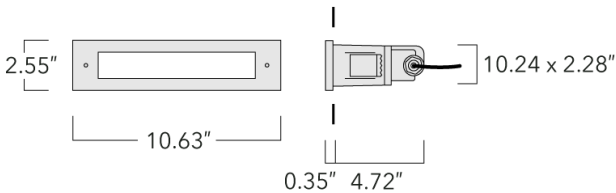

Recessed Wall Luminaires

Specifications  
Material description

Body	Marine-grade die-cast aluminium alloy
Colors	<div><div></div> RAL9004 Black</div> <div><div></div> RAL9007 Grey Metallic</div> <div><div></div> RAL9016 White</div> <div><div></div> RAL8019 Dark Bronze</div>
Ingress protection	IP66
Impact resistance	IK07

Electrical description





Power supply	Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.
Driver / Ballast	Integral EC electronic converter

Additional information


Lifetime	Ta=25°/40° L80B10 > 54000h
Listings	ETL listed. Suitable for wet locations.

Recessed Wall Luminaires

Options

Light distribution	Color temperature	Nominal Watt
 diffused distribution	 3000 K	0 W
	 4000 K	
	 2700 K	


Configurations

Light distribution	Part ID	Light source	Delivered lumens	Rated input power	CRI	Weight (lb)
diffused distribution 	190-9002	LED-5W / 250 mA - 3000 K	78.6	5.6 W	80	1.98
	190-9003	LED-5W / 250 mA - 4000 K	81.7	5.6 W	80	1.98
	190-9035	LED-5W / 250 mA - 2700 K	75.4	5.6 W	80	1.98

Mounting Accessories

Installation blackout

Description	Part ID	C1	C2	D1	D2	D3	H1	H2	H3	Weight (lb)
Installation blackout BST13-I (Proud)	190-9030	5.12	0.47	10.63	13.31		2.56	4.21		1.98

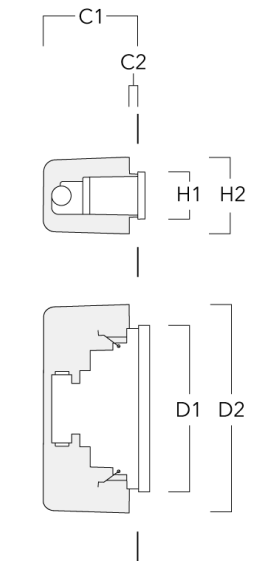

Installation blackout BST13-II (Flush)	190-9031	5.71	0.87	10.63	11.02	13.31	2.56	2.95	4.21	1.98
--	----------	------	------	-------	-------	-------	------	------	------	------

